

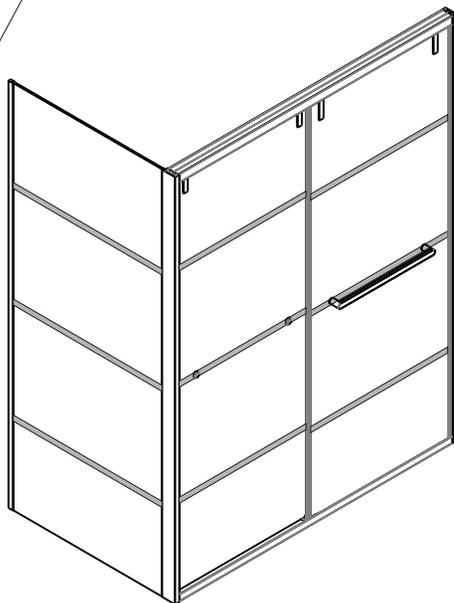


# INSTALLATION INSTRUCTIONS

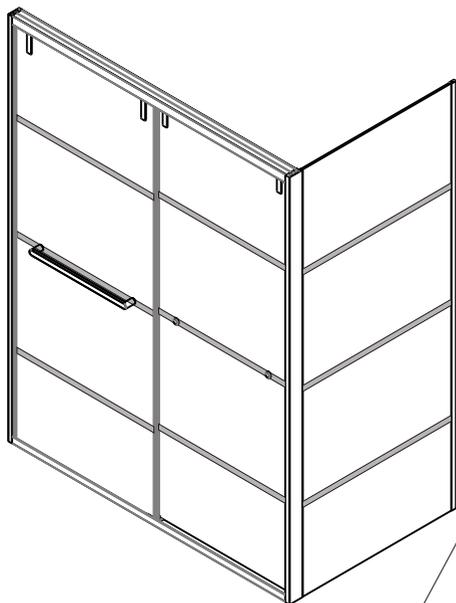

TI-4879-B/TI-6079-B  
+  
TI-SP-32-B/TI-SP-36-B

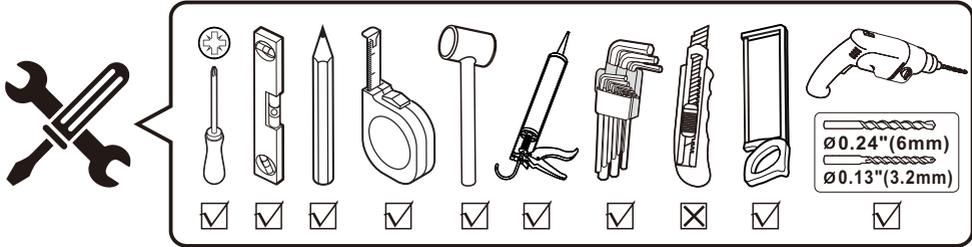

**WARNING**


When the glass is placed upright, something soft should be placed on the bottom of the Tempered Glass. Please don't hit the corners and the surrounding, otherwise the glass will burst.




## TI-4879-B/TI-6079-B Part list



[01] x2



[02] x1



[03] x1



[04] x2



[05] x4



[06] x2



[07] x4



[08] x12



[09] x6



[10] x6



## TI-SP-32-B/TI-SP-36-B Part list



[11] x3



[12] x3




[13] x1



[14] x1



[15] x1



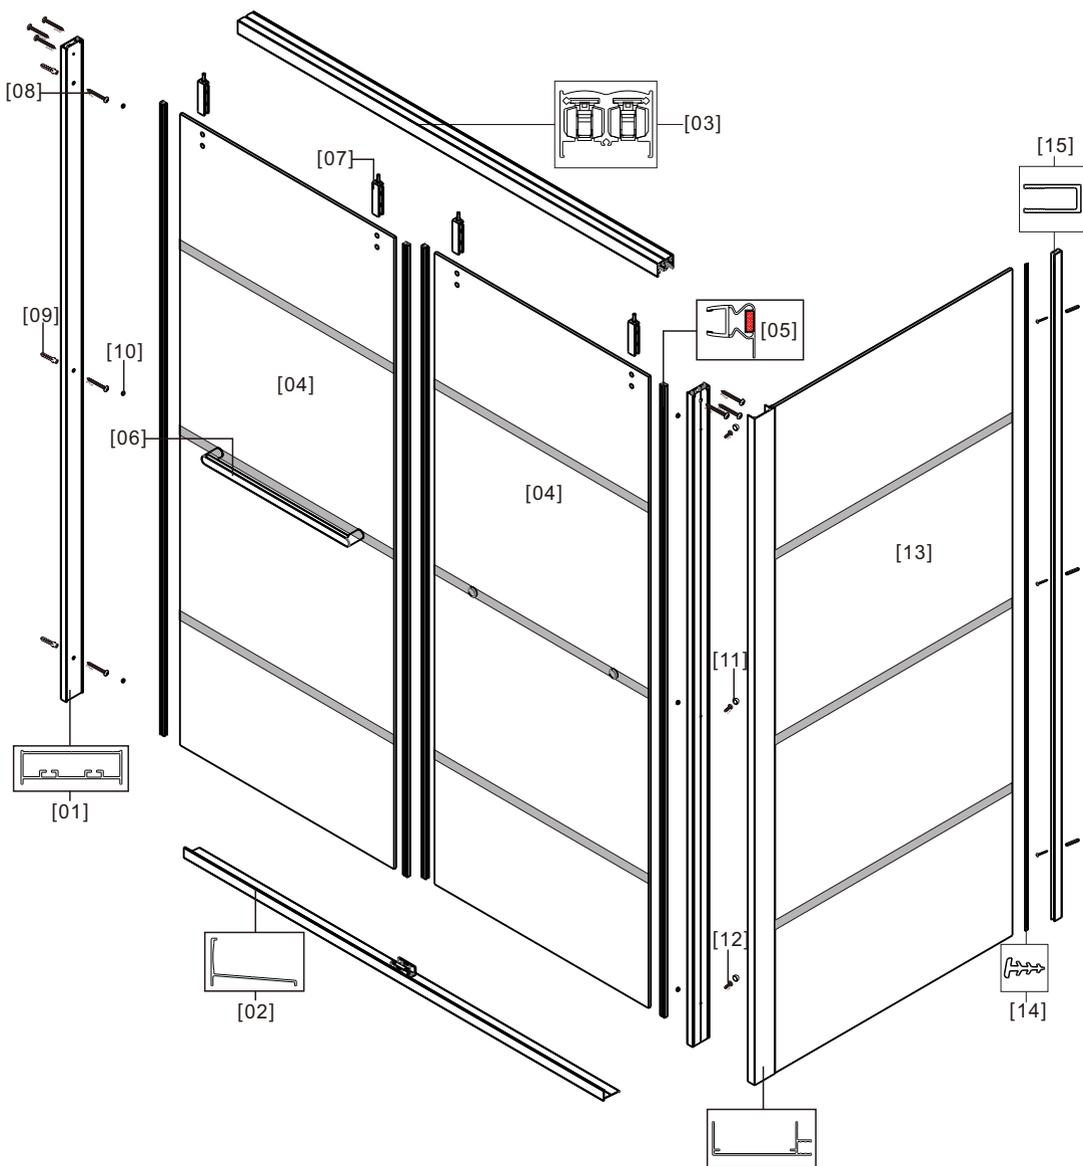




**01**






Size (mm)	L(mm)	
	Min	Max
1219	1123	1223
1524	1429	1529

Size (mm)	W(mm)	
	Min	Max
813	803	813
914	904	914

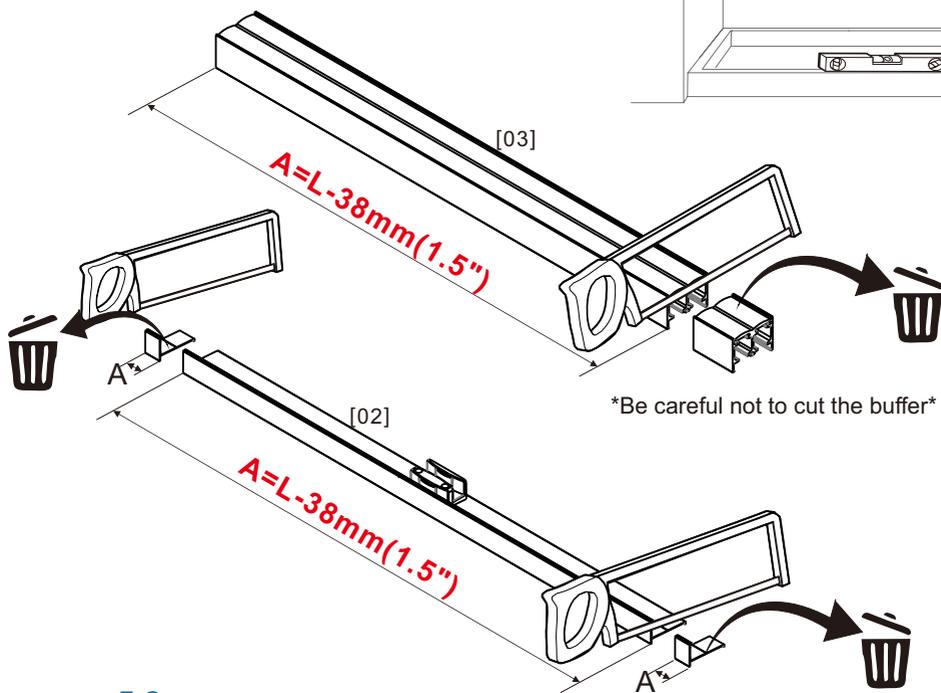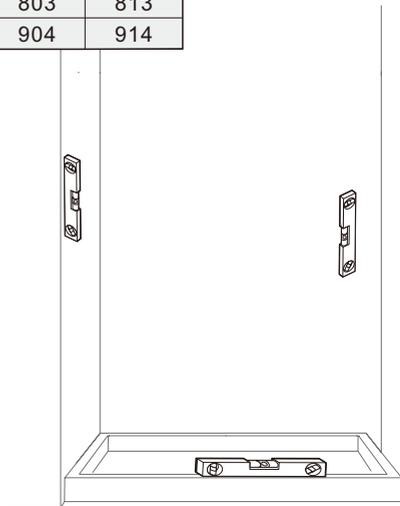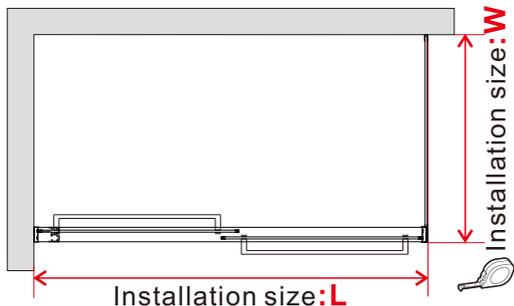


E.G.:  
L=1500mm(59")  
A=1500mm(59")-38mm(1.5")=1462mm(57.5")





# 02

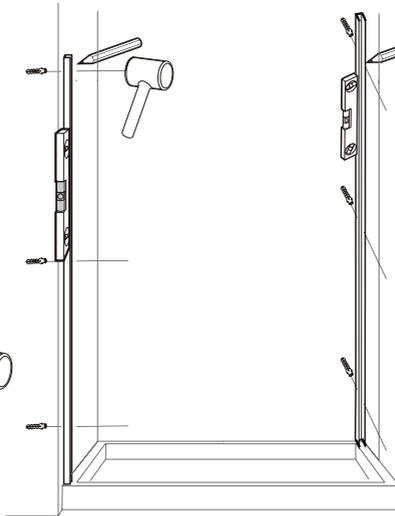


# 03

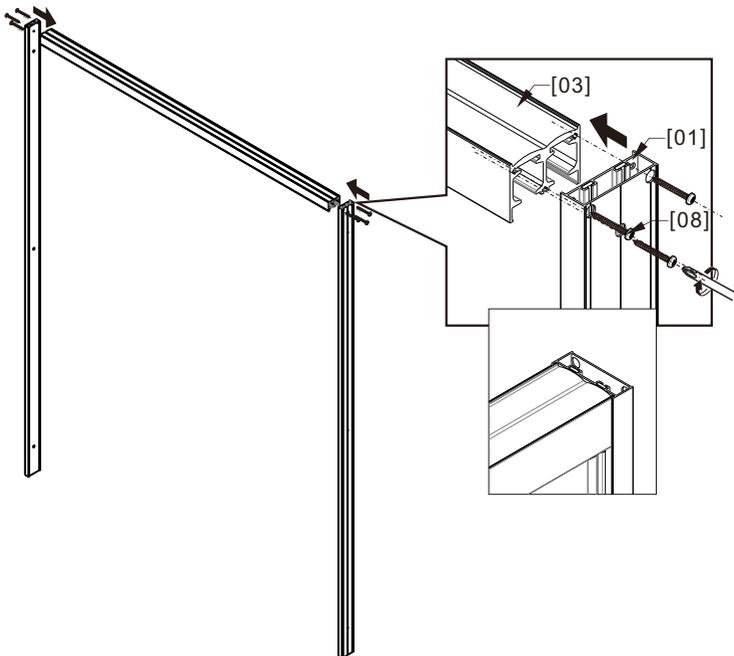


04

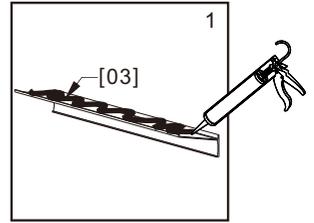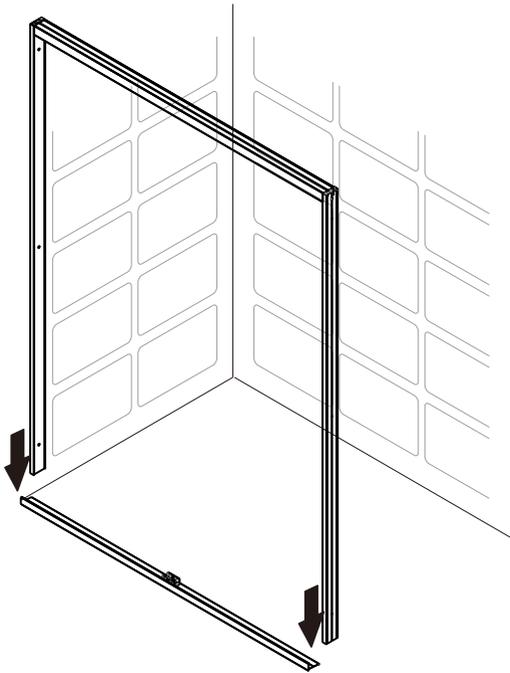


05

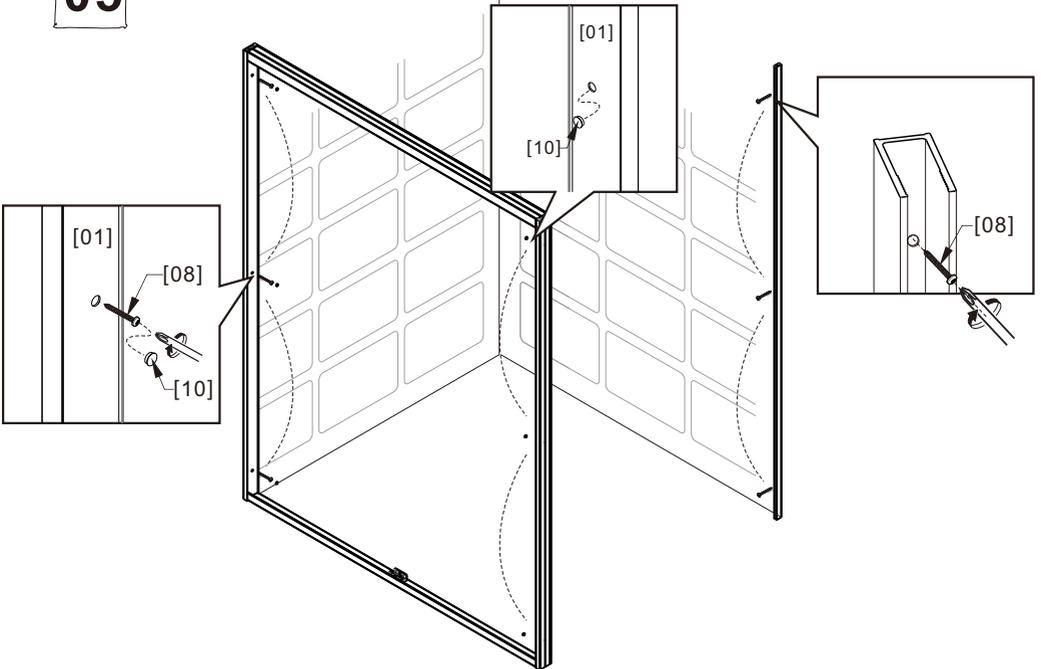





06

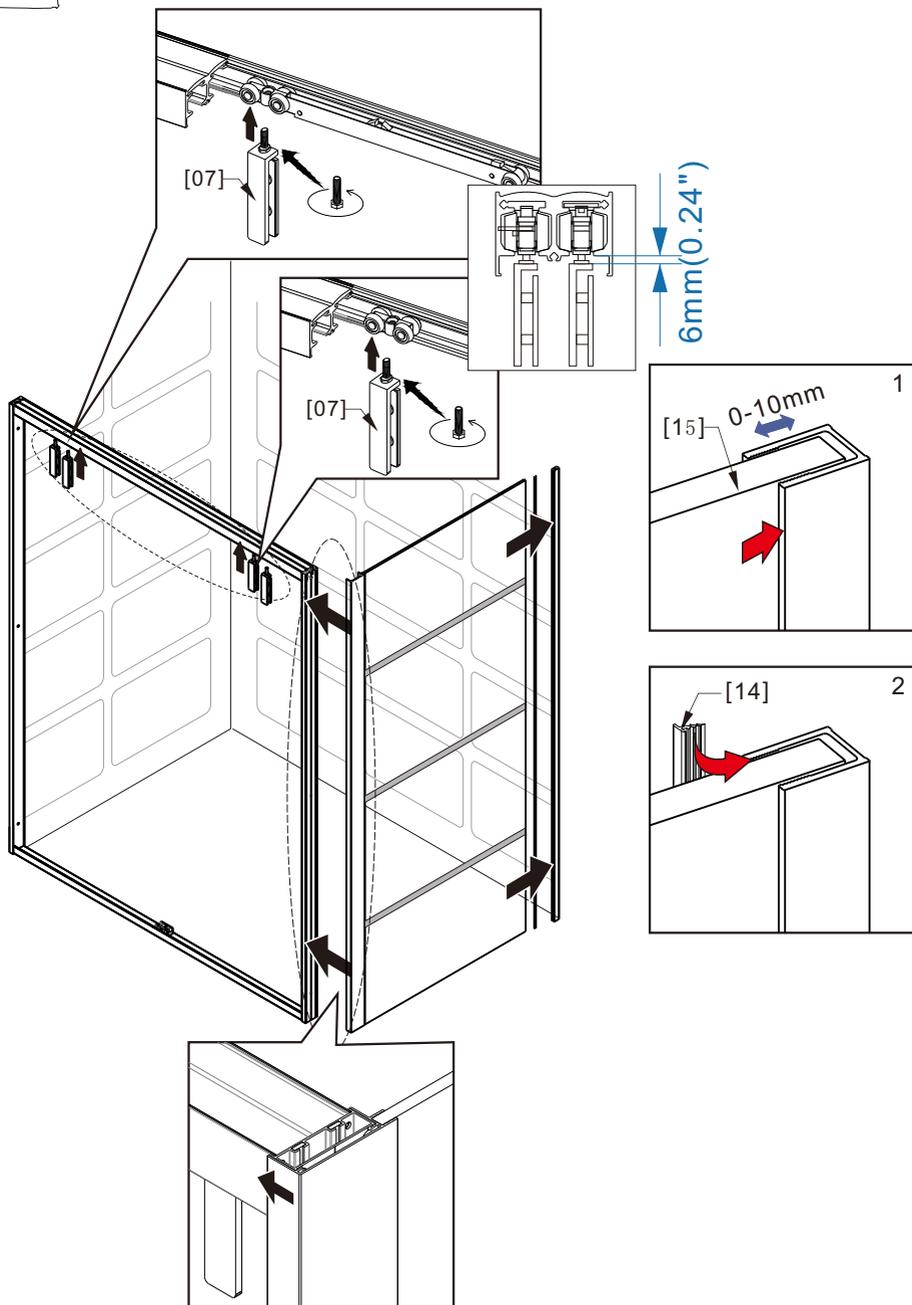



07

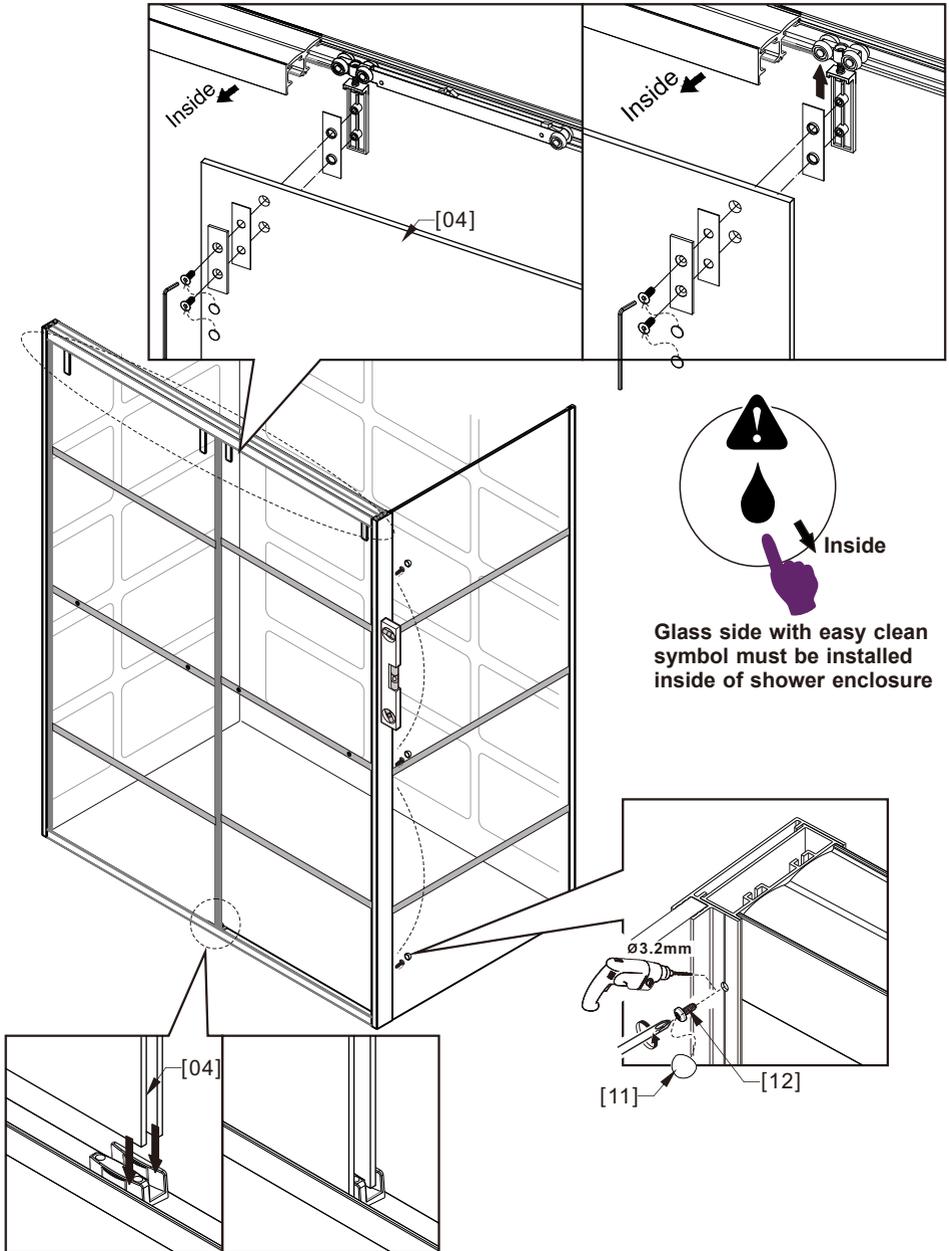




08

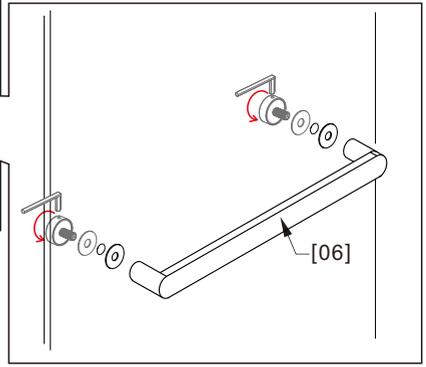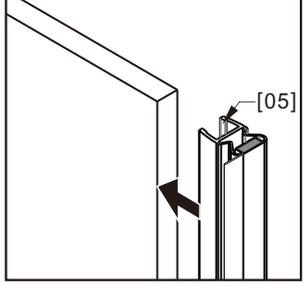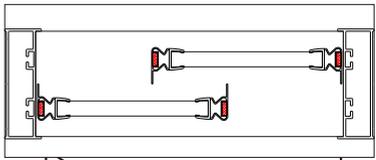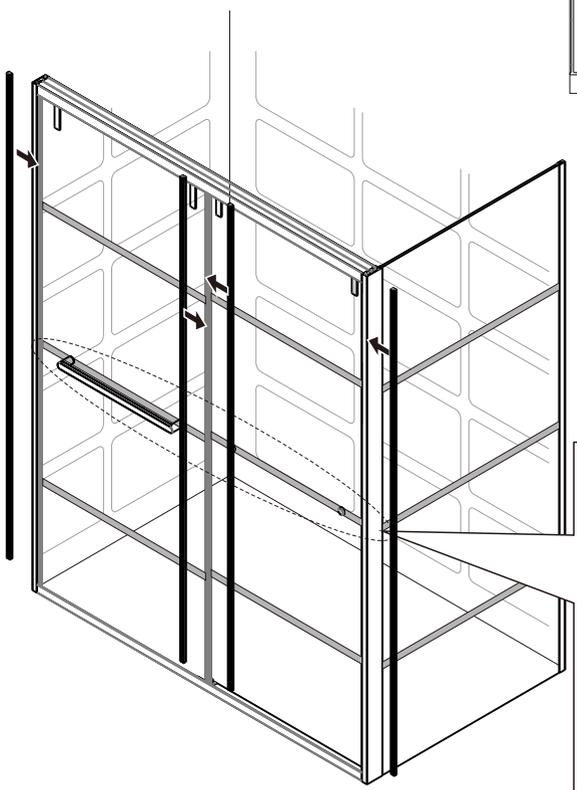

09

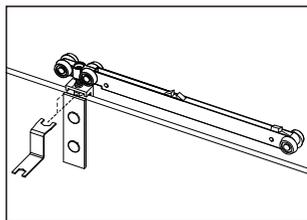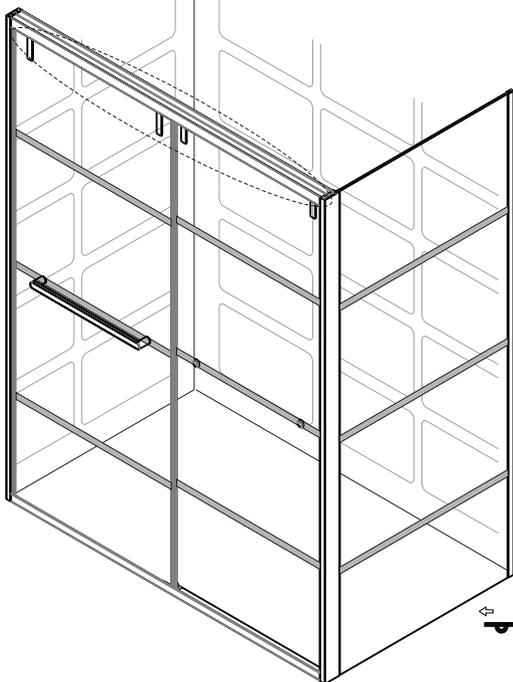

When adjusting, first lift the glass up, then use a wrench to turn the screw to adjust the height of the glass. This ensures a smooth sliding of the glass door and it properly fitting in the magnetic wall channel frame.

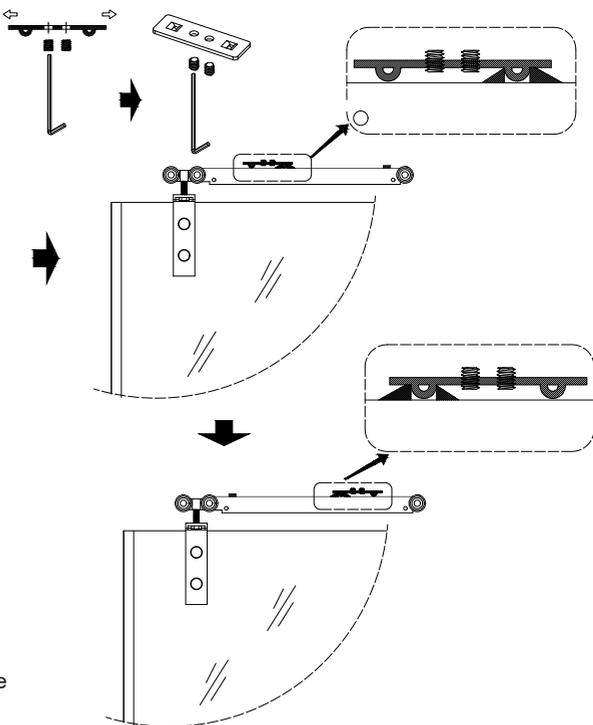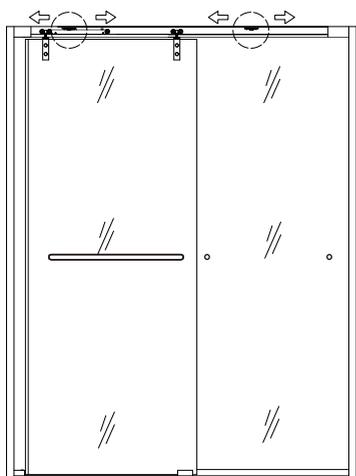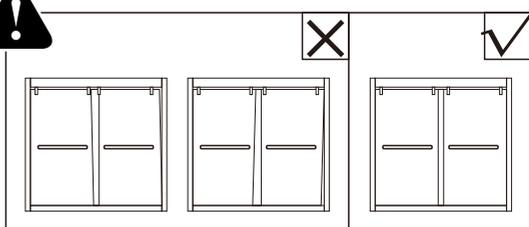

By loosening and tightening the screw of the positioning part of the buffer, it can be moved laterally to adjust the range of the buffer. Ensure that the door can now be soft closed optimally.

10

