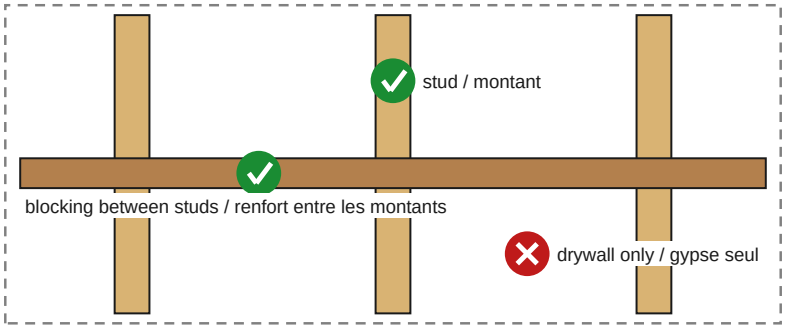


IMPORTANT: WALL MOUNTING

This vanity must be hung on the wall. Fasten the supplied wall brackets with screws into the wall studs, or into a solid backing that is itself fastened to the studs (for example a plywood panel or wood blocking installed between the studs).

Never fasten the vanity to drywall (gypsum board) or ceramic tile alone: plastic anchors in drywall will not hold its weight. On a concrete or masonry wall, use anchors made for that wall.

IMPORTANT : FIXATION AU MUR


Ce meuble-lavabo doit être fixé au mur. Vissez les supports muraux fournis dans les montants du mur, ou dans un renfort solide lui-même fixé aux montants (par exemple un panneau de contreplaqué ou des entretoises de bois posés entre les montants).

Ne fixez jamais le meuble dans le gypse ou la céramique seuls : des chevilles de plastique dans le gypse ne supporteront pas son poids. Sur un mur de béton ou de maçonnerie, utilisez des ancrages conçus pour ce mur.


Installation and Maintenance Instruction Manual

32-BRG-CMB-LG-WT

A. Installation Instruction

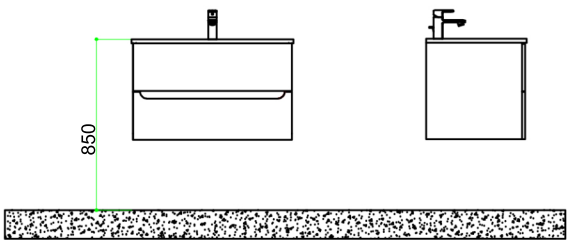


B. Installation of accessories

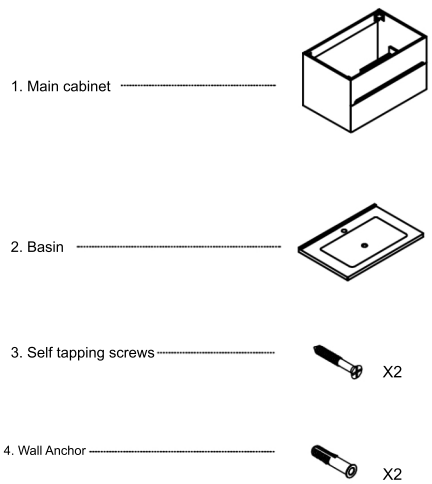


C. Tools



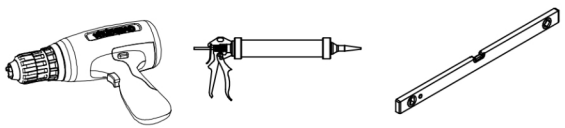


D. Installation steps

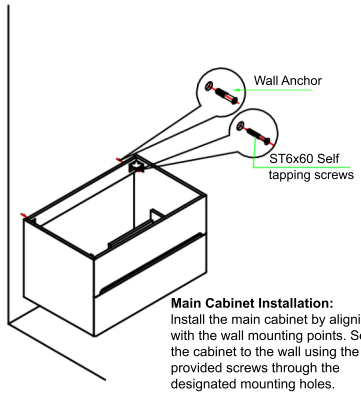

Main Cabinet Installation:
Install the main cabinet by aligning it with the wall mounting points. Secure the cabinet to the wall using the provided screws through the designated mounting holes.


1

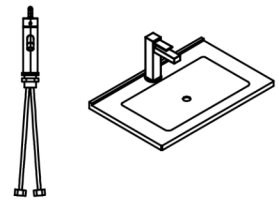

Faucet Installation:
Install the faucet on the basin and ensure all water connections are properly tightened to prevent water leakage. Secure the faucet firmly in place without over-tightenlng, which could damage the connections or cause misalignment.


2

3

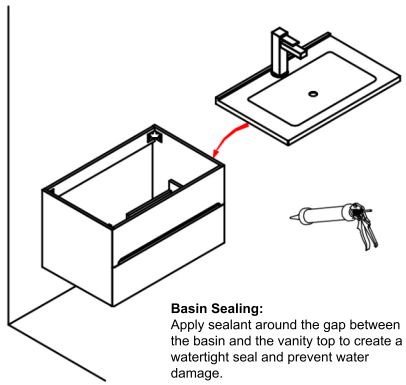


Basin Sealing:
Apply sealant around the gap between the basin and the vanity top to create a watertight seal and prevent water damage.

4




Hot and Cold Water Pipe Installation:
Connect and tighten all water supply hoses and inlet pipes to prevent water leakage. Ensure the hot and cold water pipe connections correspond correctly to the faucet's hot and cold controls (hot water to the left side, cold water to the right side).

5

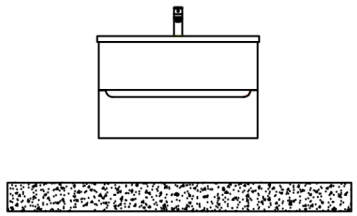

E. Final

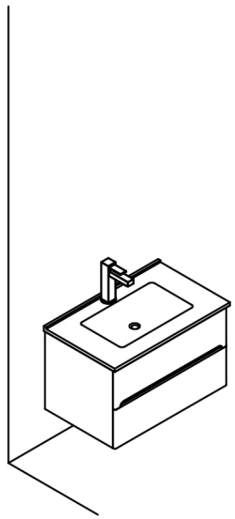

F. Daily Maintenance

⚠ Attention		
Prohibited	Cleanlng agent with (acidic) mark	Bathroom cabinet may change color
	Cleaning agent with (alkaline) mark	

IMPORTANT SAFETY REQUIREMENTS MUST BE EXECUTED:

Cleaning Requirements: Do not use acidic or alkaline cleaning agents on this vanity. Many commercial cleaners contain abrasives and harsh chemicals that can damage stainless steel. enamel, plated, or plastic surfaces. Clean only with mild detergent or soap solution, rinse thoroughly, and wipe dry with a clean cloth. Clean electric mirrors with a suede cloth for optimal performance.

Moisture and Ventilation: Maintain good bathroom ventilation at alt times by keeping win dows and doors open when possible to prevent moisture buildup. Although the cabinet has moisture-resistant treatment, never allow water to directly contact or splash onto cabinet surfaces, and immediately dry any areas that become wet or humid.

Regular Maintenance: Clean door panels regularly with a soft cloth and wipe away moisture after bathing to keep panels dry. This will help maintain the cabinet's appearance and prevent water damage over time.

Usage Restrictions: Never sit on, lean against, or step on the washbasin cabinet during use, as this can cause damage or injury. The cabinet is designed to support only its intended load and normal bathroom accessories.