


Installation and maintenance instruction manual


40-HNT-PA-SNR-TPE-PKG

A. Installation Instruction

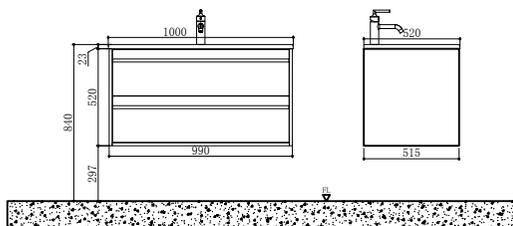


B. Installation of accessories

1. Main cabinet



2. Basins



3. Self tapping screws




X4

4. Cushion



X4

C. Tools



ø10 bit , ø8bit


Pencil

Band tap

Hammer/Cross screwdriver



Electronic drill




Glass glue/Glue gun




Level ruler

D. Installation steps

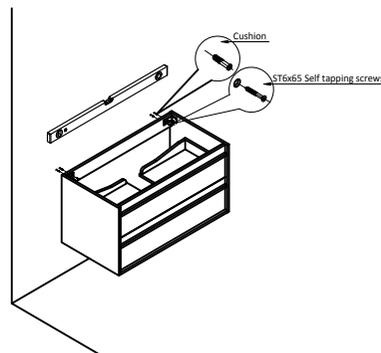


Install main cabinet
According to the lock pendant hole
The wall is fixed with screws.




Faucet installation:
Install the faucet on the basin and ensure that
the connected hose is tightened, no water leakage,
and the faucet is tightened without twisting.

1 2
3 4

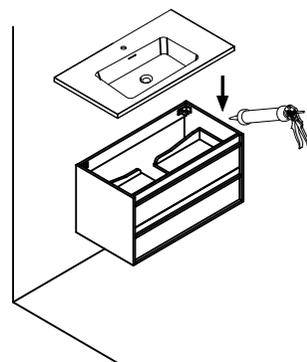


Place the glue around
the gap between the
basin and the vanity



Hot and cold water pipe installation: the hose
and the inlet water cooling pipe are tightened,
no water leakage, and the hot and cold water
pipe connection ensures synchronization with
the faucet hot and cold switch.

E. Final



F. Daily use attention

⚠ Attention

⊘ Prohibited	Cleaning agent with (acidic) mark	Bathroom cabinet may change color
	Cleaning agent with (alkaline) mark	
⚠ Must be executed	1. Many cleaners contain abrasives and chemicals and cannot be used to clean stainless steel, enamel, plating or plastic products. These surfaces must be cleaned with a mild detergent or make-up solution, the residual wash is washed, and then wiped dry with a clean soft cloth.	
	2. Please keep a good ventilation in the bathroom. you can dry and wet the separation. Usually, keep opening the window and opening the door.	
	3. The bathroom cabinets are subjected to strict moisture-proof treatment. When using, the bathroom cabinets are not allowed to be watered or splashed. Good moisture resistance can ensure good use at high relative humidity, so please avoid the bathroom is too humid, in case of water, it should be dried in time.	
	4. Maintenance of the door panel: Regularly clean and wipe with a soft cloth. The cold water vapor after bathing should be dried with a dry cloth to keep the door panel dry.	
	5. Electrical connections such as lighting should ensure that the insulation and moisture-proof mirrors are best wiped with suede, which can guarantee the quality of use for a long time.	
6. Do not sit, lean, lean on, or step on the washbasin cabinet during daily use.		