

DESCRIPTION

- Brass construction
- Includes Red/Blue indicators

FLOW

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
- North America: 1.5 gpm max (5.7L/min) at 60psi
- California: 1.2 gpm max (4.5L/min) at 60psi


CARTRIDGE

- Brass cartridge

STANDARDS


- Certified to CUPC
- Certified to AB1953
- Certified to NSF/ANSI 61

Specifications

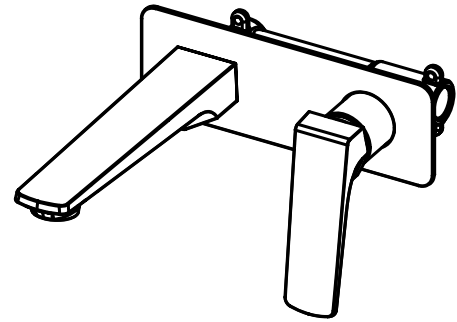


Wall Mounted Lavatory Faucet

NOTE: SPOUT INSTALLS THRU
Φ1-3/8" MIN HOLE

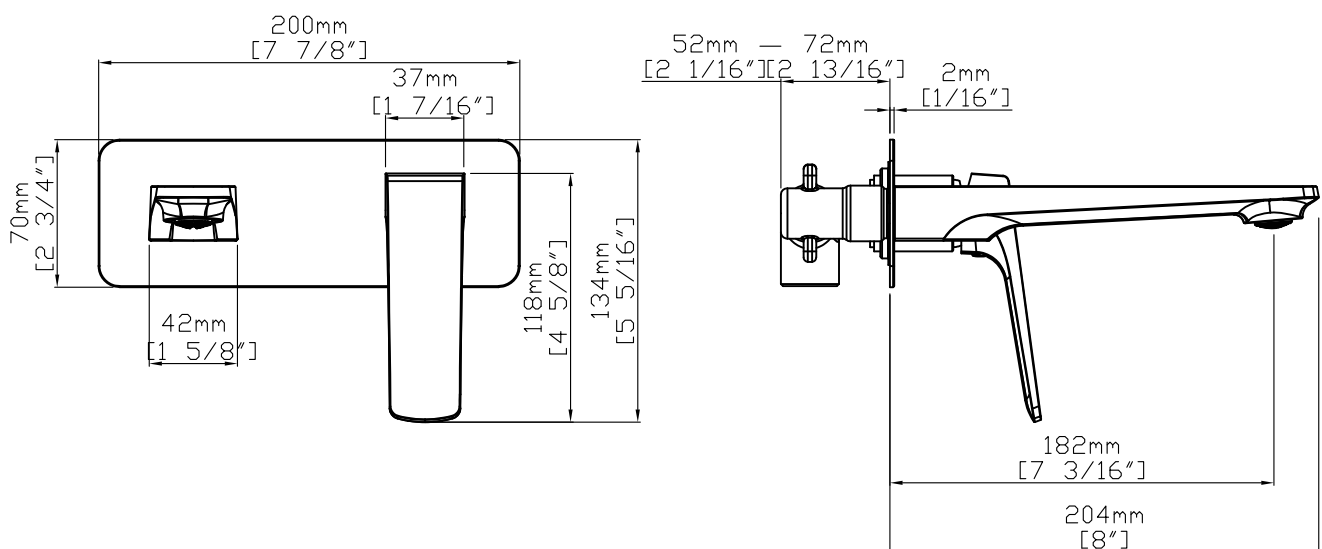


Note: Dimensions are for reference only. Detailed information is in accordance with the final product.


INSTALLATION MANUAL Tools You Will Need :



Hexagon wrench



Philips Screwdriver




Pipe Tape

Notes before installation :


1. Please check that all components are present.
2. Before installation ensure that all feed lines are clear of debris and on/off valve is present.
3. Ensure water pressure is between 20-125 PSI (includes combination of hot and cold feed lines).
4. Pictures in the manual are general in content and may not represent exactly your purchased faucet. If you are having difficulties please contact a professional plumber.
5. If you will be away from home for an extended period you should shut off the main water supply.

Daily maintenance


1. Use a soft cloth and vinegar to remove hard-water spots.
2. Check aerator (if present) regularly for calcium build up or when water stream is not optimum.
3. DO NOT use caustic cleaning products as the use will break down finish and will void the product warranty.
4. Acceptable cleaners include vinegar or mild non-abrasive liquid detergents.
5. If the water pressure appears to be less than optimum remove, inspect, clean or replace aerator.

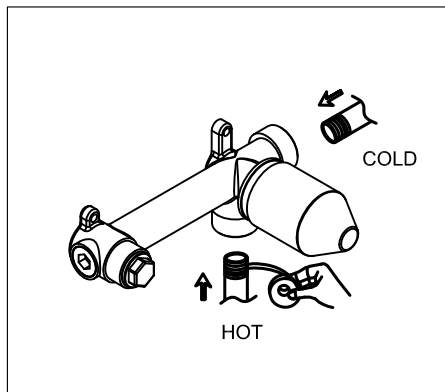


1. Use the pipe tape around the water pipe then connect to the hot and cold water pipe.

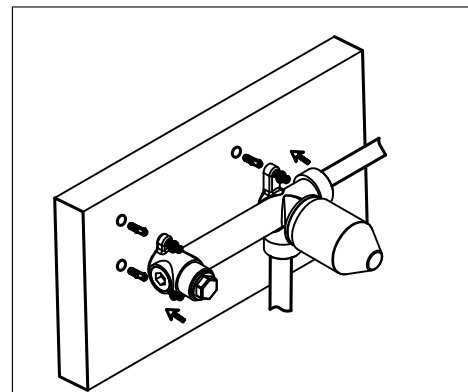


2. Fix the body of the basin faucet into the wall.

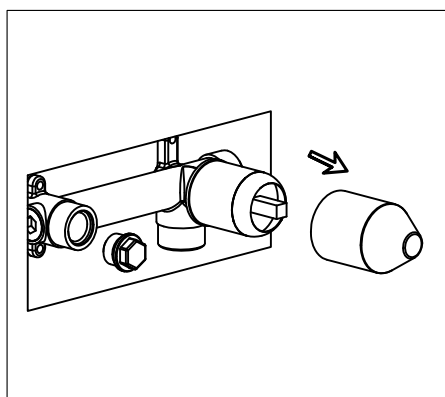


3. Remove the protection cover and plug.

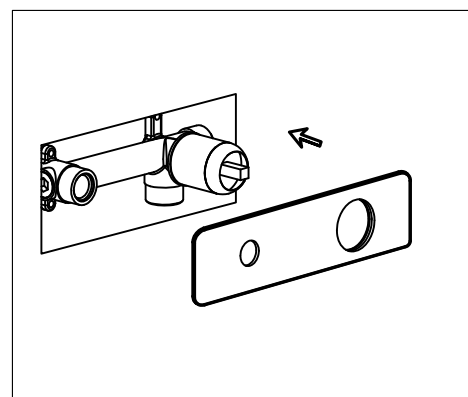

4. Install the cover.

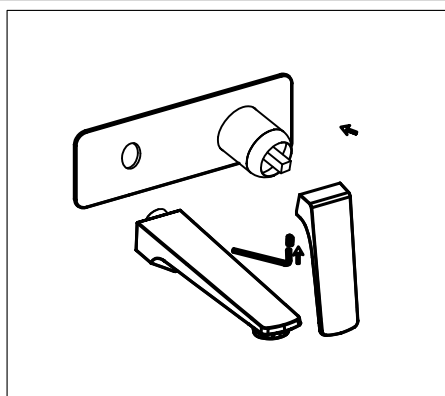

5. Use the hexagon wrench to install the handle and tighten the spout.

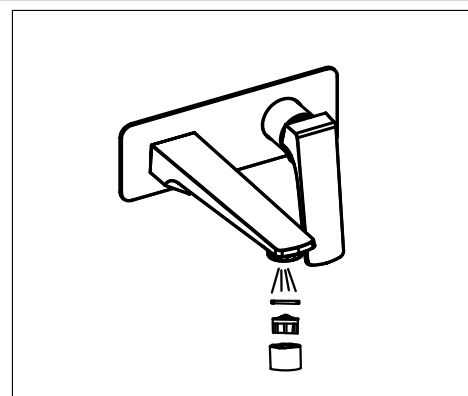

6. After install the faucet remove the aerator, turn on faucet handle for one minute to flush debris from faucet, close the handle and reassemble the aerator.