

## 40" LED Mirror

Model: M-205-40TT-AF

Size: 1000\*750\*35MM



LED Lighted Mirror with Anti-Fog

**Installation • Operation • Safety • Warranty**

### Support:

✉ [support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)

☎ 1-833-411-7372

🌐 [www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)



5mm copper-free  
silver mirror



Acrylic back frame  
and Aluminum frame



LED Mirror with  
built-in defogger



3000K / 6000K  
LED light  
(2 dimming options)



Single-touch sensor  
switch with  
dimming function




UL LED driver:  
110V



Time & Temperature  
display function

## PRODUCT FEATURES

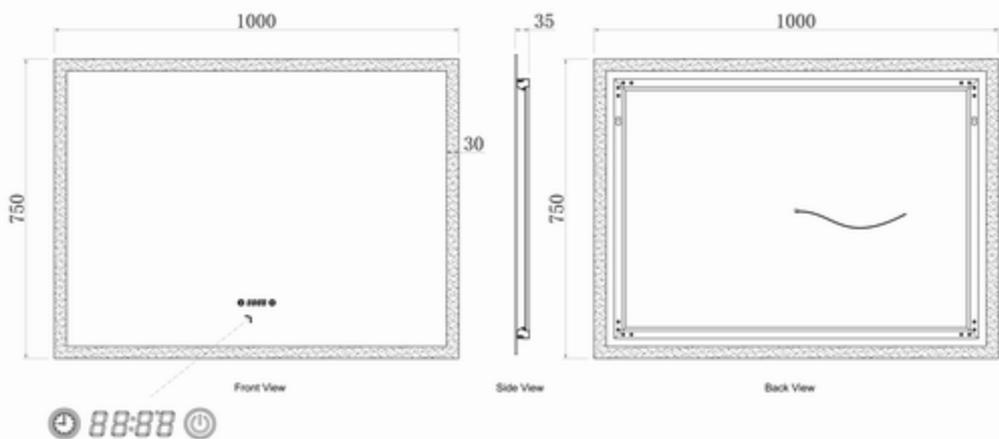

- 40" LED Mirror with built-in defogger
- Acrylic back frame and Aluminium frame
- 5mm copper free silver mirror
- 3000k/6000k LED light
- Single touch sensor switch with dimming function
- UL LED driver : 110V
- Time & Temperature display function

CONTACT US AT:

✉ [support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)

☎ 1-833-411-7372

🌐 [www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

## QUICK START

1. Turn OFF power at the breaker (verify with tester).
2. Locate studs and mark centerline; use included paper template.
3. Install hanging bar/brackets level.
4. Make hard-wired electrical connections.
5. Hang mirror; lock-catch for horizontal mount.
6. Restore power; test touch sensors (light + anti-fog).

## SAFETY & COMPLIANCE

- Installation by a licensed electrician only.
- Connect to a GFCI-protected, properly grounded circuit (120 V~ 60 Hz).
- Do not connect to any wall dimmer (ELV/triac). Use a standard ON/OFF switch if desired; dimming happens on the mirror.
- Two-person lift required; use PPE.
- Mount into wall studs whenever possible; use proper anchors for wall type.



DANGER



GFCI Protected



No wall dimmer



Ground properly



Two-person lift



PPE

### CONTACT US AT:



support@serabathroomdesigns.com



1-833-411-7372



www.serabathroomdesigns.com

# SERA

BATHROOM  
DESIGNS

# 40" Chrono LED Mirror

Frosted Edge with Time, Temperature and Defogging

Model: M-205-40TT-AF

Size: 1000\*750\*35MM

## WHAT'S IN THE BOX & TOOLS

### INCLUDED



Mirror  
assembly



Wall  
screws  
(x2)



Anchors (x2)

### TOOLS NEEDED



Band tap



Level



Pencil



PPE



Drill bits



Electronic drill



Cross screwdriver



Stud finder

### CONTACT US AT:



[support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)



1-833-411-7372



[www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

## HARDWIRE INSTRUCTIONS

**Warning: Manufacturer's warranty shall be void if product is not installed by a licensed professional**

Prior to commencing installation, please ensure the following:

- The wall where the product is being installed is able to support the weight of the product
- The main electrical supply has been powered off to complete installation

### IMPORTANT: Wiring Instructions for Canada & USA



This fixture's wiring colors may not align with standard North American guidelines. For a safe installation, please re-identify the fixture wires with electrical tape as follows:

**LIVE:** Wrap black tape on the fixture's White wire. Connect this to your home's Black (Live) wire.

**NEUTRAL:** Wrap white tape on the fixture's Black wire. Connect this to your home's White (Neutral) wire.

**GROUND:** Connect the Green wire to your home's Green or Bare Copper ground wire.

Please consult a licensed electrician if you are unsure.

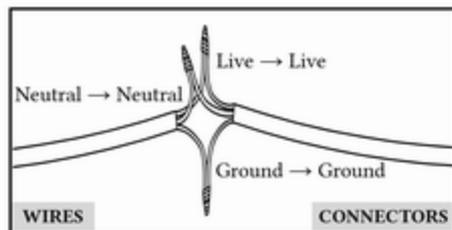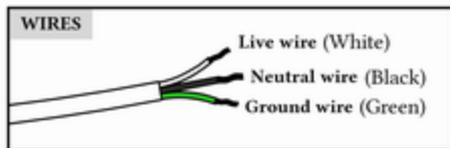

### Important

- Hard-wire only. Do not attach a cord-and-plug.
- Use listed wire connectors; make all splices inside approved boxes.
- Do not use a wall dimmer. Use a standard ON/OFF switch if wall control is required.

### CONTACT US AT:

✉ [support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)

☎ 1-833-411-7372

🌐 [www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

# SERA

BATHROOM  
DESIGNS


## 40" Chrono LED Mirror

Frosted Edge with Time, Temperature and Defogging

Model: M-205-40TT-AF

Size: 1000\*750\*35MM

### WALL MOUNTING INSTRUCTIONS

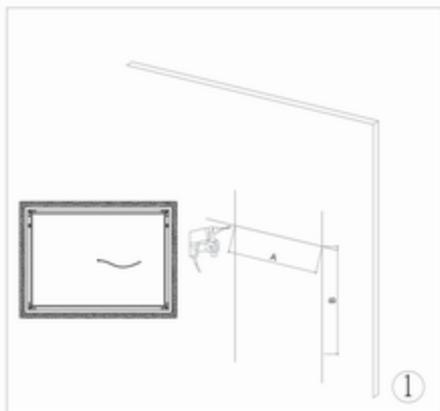


Measure the distance of the mounting hole.


Drill holes with a suitable sized drill.



Insert the anchor and mounting screw into the wall.

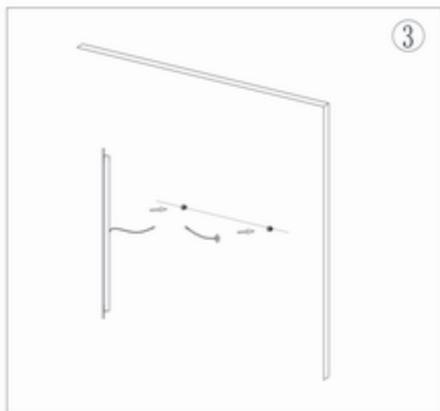

Connect the mirror wires with your main wires and hang the mounting hole to the screw on the wall.

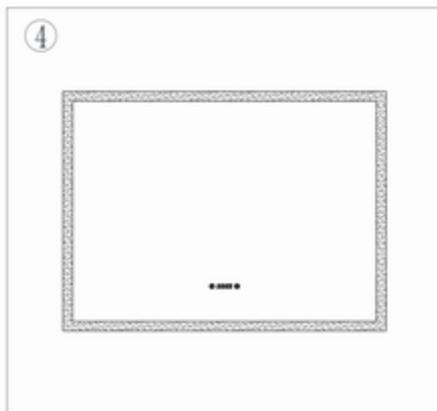

Peel off protective film and clean the mirror with damp cloth.

#### CONTACT US AT:

✉ [support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)

☎ 1-833-411-7372

🌐 [www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

## OPERATION & FEATURES




### MIRROR LIGHT USE

Short touch the Power button (right touch sensor), to turn on / off the mirror light.



### DIMMING LIGHT USE

Long touch the Power button (right touch sensor), to dimming the mirror light.




15%, 50%, and 100% dimming levels.



### SET UP CLOCK AND TEMP

1. Long touch the Clock button for 5 sec. (left touch sensor), to enter hours setting mode. Sensor starts flashing.
2. Short touch the Clock button (left touch sensor), to set hours.
3. Long touch the Clock button for 5 sec. (left touch sensor), to enter minutes setting mode. Sensor starts flashing.
4. Short touch the Clock button (left touch sensor), to set minutes.
5. Long touch the Clock button for 5 sec. (left touch sensor), to switch temperature Celsius or Fahrenheit. Sensor starts flashing.



### CONTACT US AT:

✉ [support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)

☎ 1-833-411-7372

🌐 [www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

# SERA

BATHROOM  
DESIGNS

# 40" Chrono LED Mirror

Frosted Edge with Time, Temperature and Defogging

Model: M-205-40TT-AF

Size: 1000\*750\*35MM

## CARE & CLEANING AND TROUBLESHOOTING

### CARE & CLEANING



Wipe with a soft, lint-free cloth; mild non-ammonia cleaner.



Do not use abrasives, pads, acids, or solvents.



Apply cleaner to cloth, not directly on sensor areas.

### TROUBLESHOOTING (QUICK FIXES)



No light at install: Confirm breaker ON, correct wiring, internal quick-connects fully seated.



Touch unresponsive: Power cycle at breaker for 60 seconds; clean/dry glass over sensors.



Buzz/Hum: Ensure unit is not on a wall dimmer; verify solid ground.



Anti-fog not warming: Ensure left sensor is ON; feature auto-turns-off after 1 hour.

#### CONTACT US AT:



[support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)



1-833-411-7372



[www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)