


## 48" LED Mirror: Aura Collection

Model: M-48AU

Size: 1200\*750\*34MM

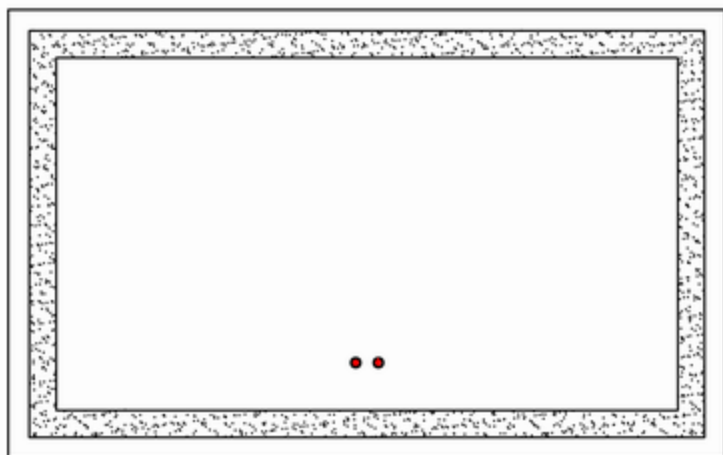

LED Lighted Mirror with Internal LED Light

**Installation • Operation • Safety • Warranty**

### Support:

✉ [support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)

☎ 1-833-411-7372

🌐 [www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)



Minimum 80 CRI



5mm thick  
copper-free  
mirror



Anti-fog and  
dimming function



Touch sensor  
switch



Over 50,000 hours  
life expectancy



Internal  
LED  
light guides



Brightness  
5185 lumens




Four sides  
frost lighted



Anodized  
aluminum  
rustproof

## PRODUCT FEATURES

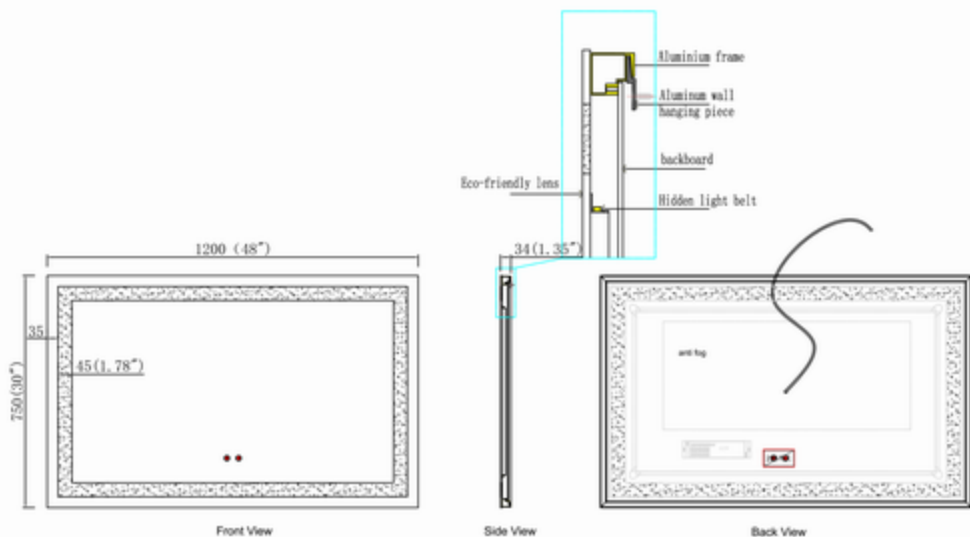

- Features an anodized aluminum construction with a durable rustproof and chip-resistant finish
- Internal LED light guides provide optimal lighting
- Brightness of 5185 lumens ensures consistent lighting
- Minimum 80 CRI (colour rendering index) is ideal for makeup application, grooming, and skincare routine
- Integrated LED bulbs have an estimated life expectancy of over 50,000 hours
- Includes a touch sensor switch
- Anti-fog and dimming function
- Four sides frost lighted
- 5mm thick copper-free mirror

CONTACT US AT:

✉ [support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)

☎ 1-833-411-7372

🌐 [www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

## QUICK START

1. Turn OFF power at the breaker (verify with tester).
2. Locate studs and mark centerline
3. Install hanging bar/brackets level.
4. Make hard-wired electrical connections.
5. Hang mirror; lock-catch for horizontal mount.
6. Restore power; test touch sensors (light, anti-fog).

## SAFETY & COMPLIANCE

- Installation by a licensed electrician only.
- Connect to a GFCI-protected, properly grounded circuit (120 V~ 60 Hz).
- Do not connect to any wall dimmer (ELV/triac). Use a standard ON/OFF switch if desired; dimming happens on the mirror.
- Two-person lift required; use PPE.
- Mount into wall studs whenever possible; use proper anchors for wall type.



DANGER



GFCI Protected



No wall dimmer



Ground properly



Two-person lift



PPE

### CONTACT US AT:



[support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)



1-833-411-7372



[www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

## WHAT'S IN THE BOX & TOOLS

### INCLUDED



Mirror  
assembly



Hanging  
bar



Wall  
screws  
(x2)



Anchors  
(x2)

### TOOLS NEEDED



Band  
tap



Level



Pencil



PPE



Drill  
bits



Electronic  
drill



Cross  
screwdriver



Stud  
finder

### CONTACT US AT:

✉ [support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)

☎ 1-833-411-7372

🌐 [www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

## HARDWIRE INSTRUCTIONS

**Warning: Manufacturer's warranty shall be void if product is not installed by a licensed professional**

Prior to commencing installation, please ensure the following:

- The wall where the product is being installed is able to support the weight of the product
- The main electrical supply has been powered off to complete installation

### IMPORTANT: Wiring Instructions for Canada & USA



This fixture's wiring colors may not align with standard North American guidelines. For a safe installation, please re-identify the fixture wires with electrical tape as follows:

**LIVE:** Wrap black tape on the fixture's White wire. Connect this to your home's Black (Live) wire.

**NEUTRAL:** Wrap white tape on the fixture's Black wire. Connect this to your home's White (Neutral) wire.

**GROUND:** Connect the Green wire to your home's Green or Bare Copper ground wire.

Please consult a licensed electrician if you are unsure.

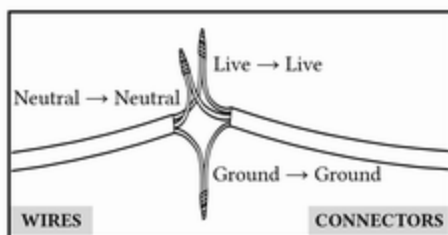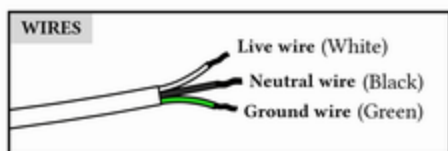

### Important

- Hard-wire only. Do not attach a cord-and-plug.
- Use listed wire connectors; make all splices inside approved boxes.
- Do not use a wall dimmer. Use a standard ON/OFF switch if wall control is required.

### CONTACT US AT:


✉ [support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)

☎ 1-833-411-7372

🌐 [www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)


## WALL MOUNTING INSTRUCTIONS

- 1** Measure the distance between the bottom of the mirror and point **a**.

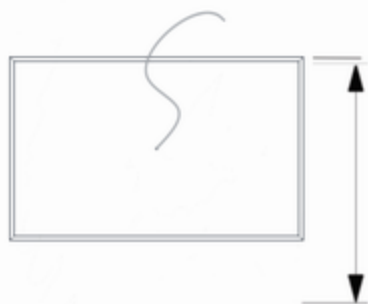


**WARNING:**  
Mounting bracket must be attached to furring strip/channel or wall stud.


- 2** Draw a horizontal line from the point **a** using a level.



- 3** Attach the mounting bracket to the wall.



- 4** Connect the Hard Wire to the mirror.

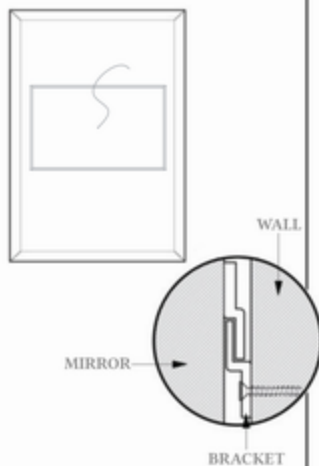

- 5** Hang the mirror on the bracket.



CONTACT US AT:

✉ support@serabathroomdesigns.com

☎ 1-833-411-7372

🌐 www.serabathroomdesigns.com

## OPERATION & FEATURES




### MIRROR DEFOGGING USE

Short touch the left Touch sensor to turn on / off the mirror defogging function.



### MIRROR LIGHT USE

Short touch the right Touch sensor to turn on / off the mirror light.



### DIMMING LIGHT USE

Long touch the right Touch sensor to dimming the mirror light.

15%, 50%, and 100% dimming levels.

### CONTACT US AT:

✉ [support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)

☎ 1-833-411-7372

🌐 [www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

## CARE & CLEANING AND TROUBLESHOOTING

### CARE & CLEANING



Wipe with a soft, lint-free cloth; mild non-ammonia cleaner.



Do not use abrasives, pads, acids, or solvents.



Apply cleaner to cloth, not directly on sensor areas.

### TROUBLESHOOTING (QUICK FIXES)



No light at install: Confirm breaker ON, correct wiring, internal quick-connects fully seated.



Touch unresponsive: Power cycle at breaker for 60 seconds; clean/dry glass over sensors.



Buzz/Hum: Ensure unit is not on a wall dimmer; verify solid ground.



Anti-fog not warming: Ensure left sensor is ON; feature auto-turns-off after 1 hour.

#### CONTACT US AT:



[support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)



1-833-411-7372



[www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)