


# SUPEXNOIR

Premium EVA acoustic membrane for SPC and vinyl click installations. Built-in vapor barrier, FIIC 61 impact sound control — engineered for concrete slabs, plywood subfloors, and below-grade installations.

ACOUSTIC RATING

FIIC 61

100 sq ft / Roll

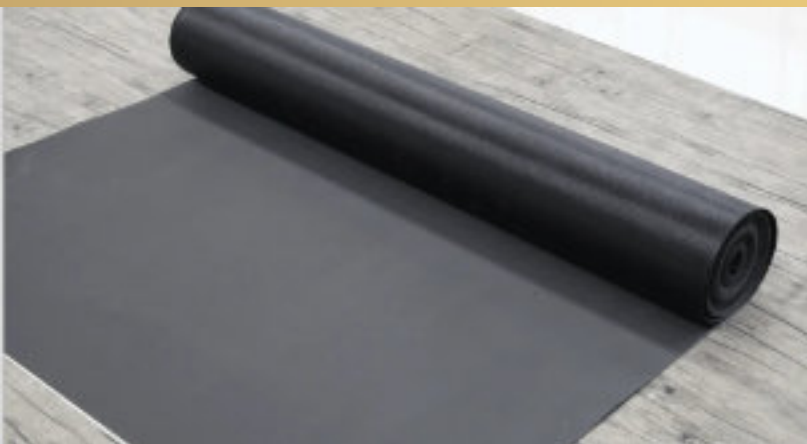

## Key Features



### FIIC 61 Acoustic Rating

Controls impact sound and airborne noise — measurably quieter footsteps between floors.



### Built-In Vapor Barrier

Blocks moisture wicking from concrete and plywood — no separate barrier needed.



### EVA Terpolymer Construction

Ethylene Vinyl Acetate provides durable, flexible cushioning that rebounds underfoot.



### Ultra-Slim 1.5mm Profile

Adds protection without bulk — preserves door clearances and transition heights.



### Quick Roll-Out Installation

47.25" × 51' roll covers 100 sq ft in minutes. Works floating or glue-down.

## Technical Data

Coverage Area	100 sq ft / roll
Roll Dimensions	47.25" × 51'
Thickness	1.5 mm
Construction Type	EVA Terpolymer
Acoustic Rating	FIIC 61
Sound Absorbing	✓ Yes
Vapor Barrier	✓ Included
Moisture Resistant	✓ Yes
For Use with SPC / Vinyl Click	✓ Yes
Floating Installation	✓ Yes
Glue-Down Installation	✓ Yes
For Use with Concrete	✓ Yes
For Use with Plywood	✓ Yes