Specifications

OPERATION

• Thermostatic function, maintains the temperature at 38 degrees Celsius

• Adjustable temperature, maximum hot water temperature of 56 degrees Celsius, minimum cold water temperature of 15 degrees Celsius, depending on the local water system

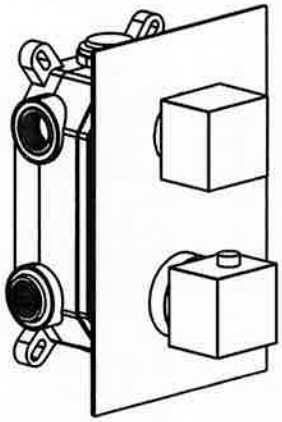

FLOW

• Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi

• Handheld shower is limited to 2.5 gpm (9.5 L/min) at 80 psi

• Bathtub spout is limited to a minimum of 2.4 gpm (9.0 L/min) at 20 psi

CARTRIDGE

• Thermostatic cartridge

STANDARDS

• Third-party certified to meet ASME A112.18.1 and all applicable requirements referenced therein

Three-Function Concealed Shower Set

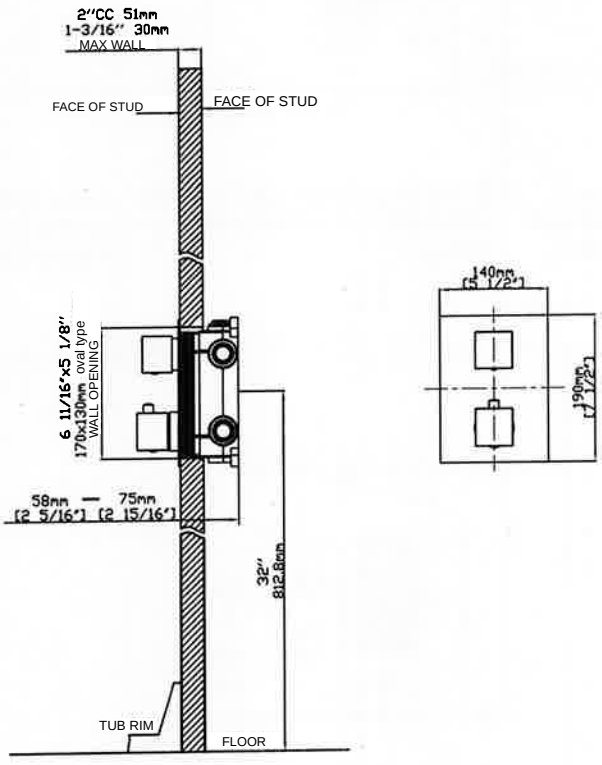

Note: Dimensions are for reference only. Detailed information is in accordance with the final product.