

Specifications

OPERATION

- Lever style handle with temperature indicator on the escutcheon
- Handle operates counterclockwise through a 120° arc with off at 6 o'clock and maximum hot at the 2 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3.6^{\circ}\text{F} (\pm 2^{\circ}\text{C})$

FLOW


- Showerhead is limited to 2.5gpm(9.5L/min) at 80psi
- Bathtub spout is minimum to 2.4gpm(9.0L/min) at 20psi

CARTRIDGE



- Thermostatic cartridge

STANDARDS

- Third party certified to meet ASME A112.18.1 all applicable requirements referenced therein
- ADA  for lever handle

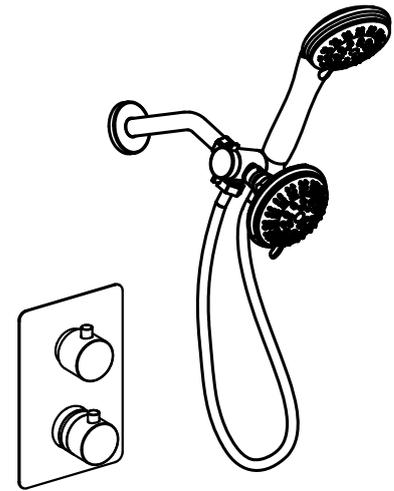

Concealed Shower Set

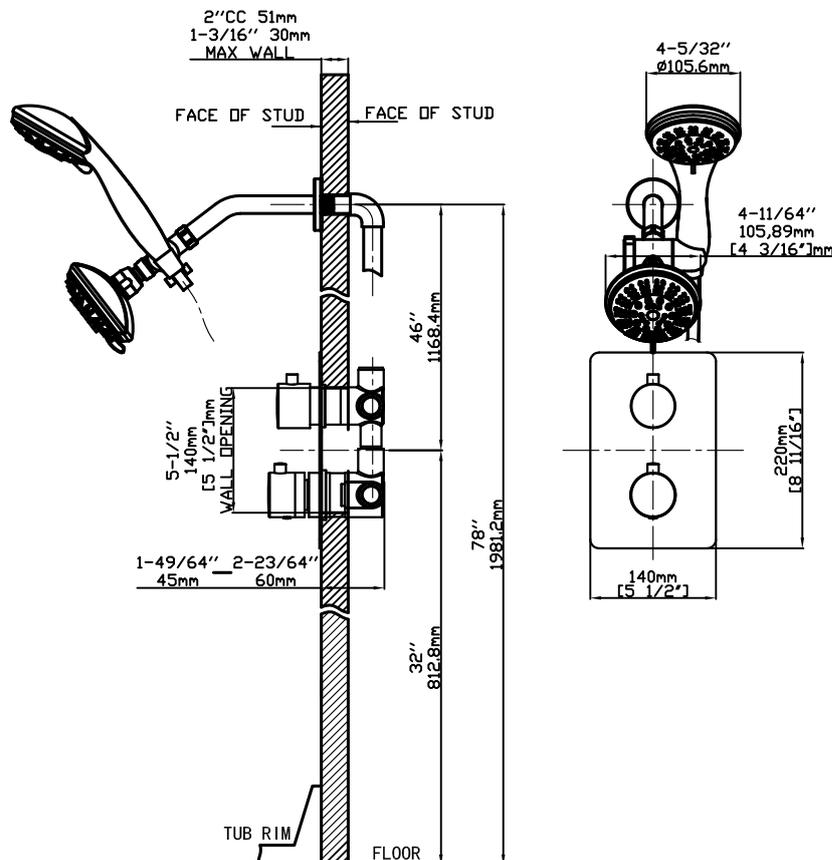

Note: Dimensions are for reference only. Detailed information is in accordance with the final product.