




INSTALLATION MANUAL Tools You Will Need :



Adjustable wrench



Pipe Tape




Hexagon wrench




Knife

Notes before installation :


1. Please check that all components are present.
2. Before installation ensure that all feed lines are clear of debris and on/off valve is present.
3. Ensure water pressure is between 20-125 PSI (includes combination of hot and cold feed lines).
4. Pictures in the manual are general in content and may not represent exactly your purchased faucet. If you are having difficulties please contact a professional plumber.
5. If you will be away from home for an extended period you should shut off the main water supply.

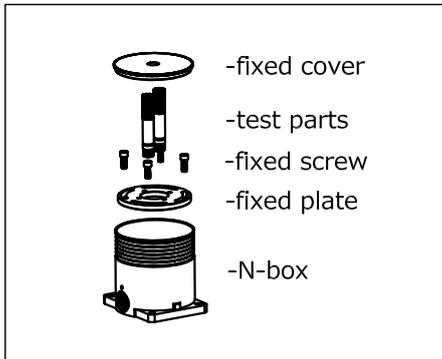


1. N-BOX BOM DRAWING.

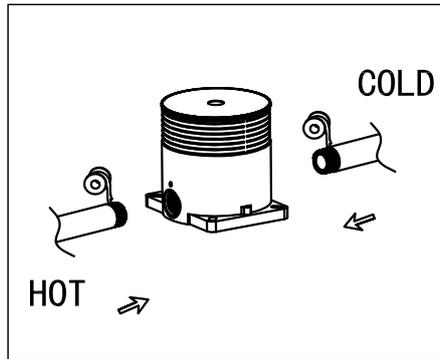


2. Tighten up the connector with pipe tape, Jointing hot and cold water joint, prevent no leakage.

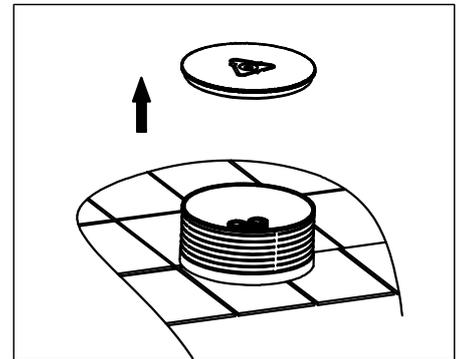


3. Open the embeded box cover.

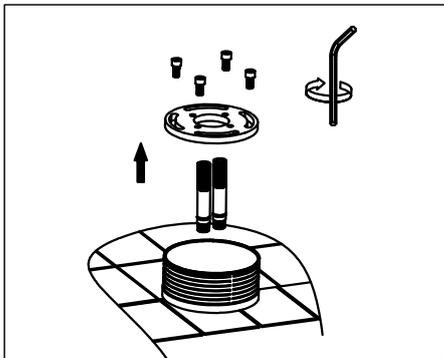


4. Take spare parts, cover, test parts and gaidiometer.

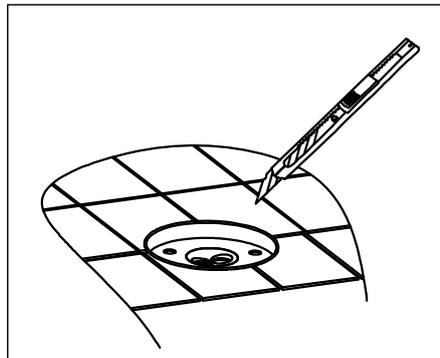


5. Cutting the embeded box along the tiles surface by knife.

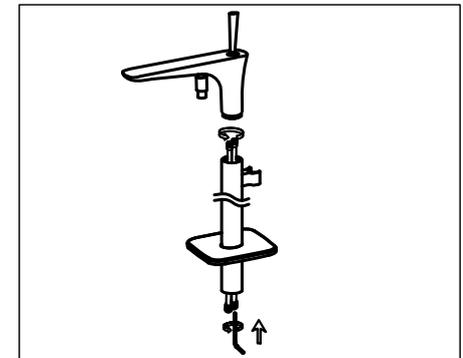


6. Connect body by H8 screw tool, install the decorative cover from top of the pipe, tighten up inlet pipe to the body with H8 hex key.

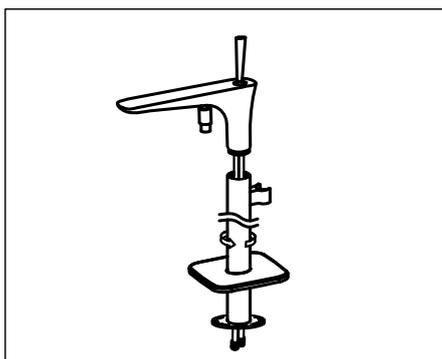

7. Tighten up the pipe to the body.

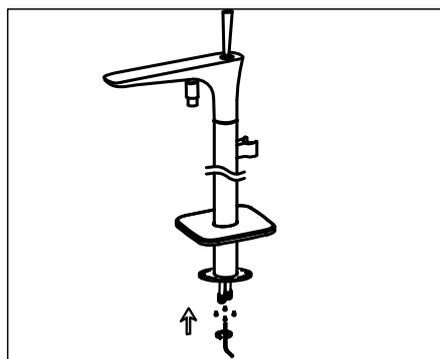

8. Take fixed plate connect the pipe with H3 hex key.

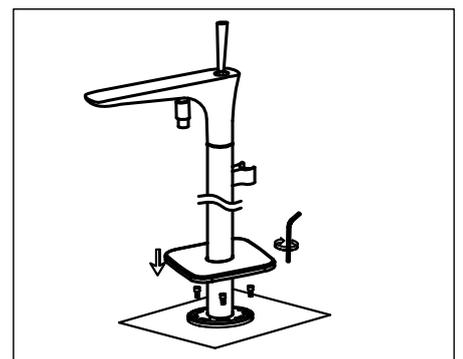

9. Fix pipe in N-box, adjust position, fix plate by M5 screw.