

Towel Rail Installation

- Read the instruction sheet carefully before installation.
- Installation should be completed by a professional electrician.
- Please dispose the package properly.

tools required



Screwdriver



Pencil



Spirit Level




Rubber Hammer



Tape Measure





Gloves







Electric Drill



Drill Bit

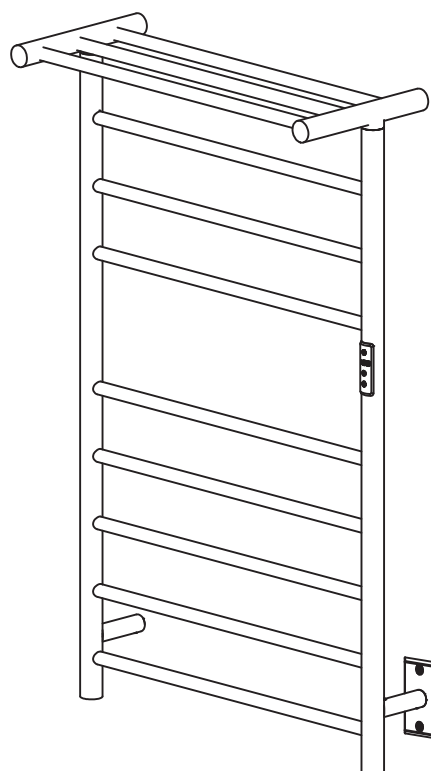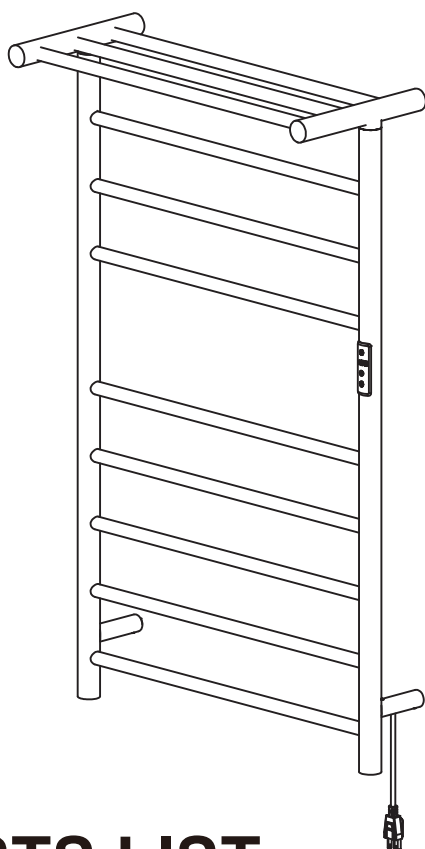

PARTS LIST




INSTALLATION

This product can be both plug-in and hardwire installation, choose one based on need.

1. Plug-in Installation (1 / 2)

01

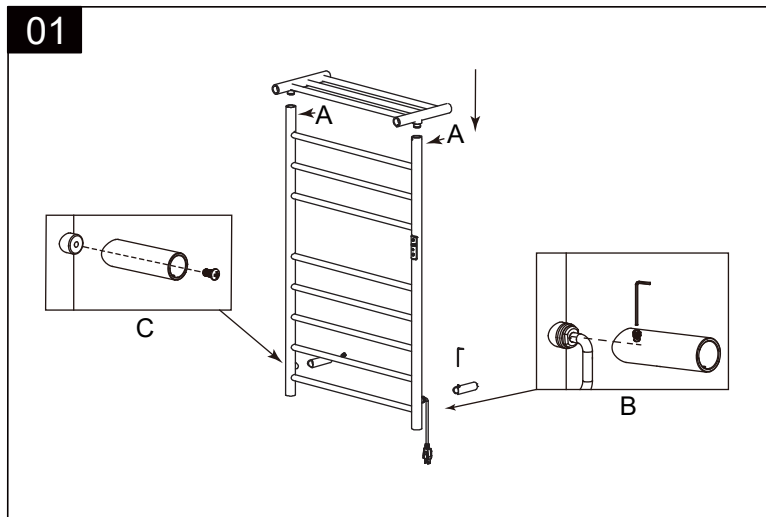

STEP 1:

Install the Shelf [14] at the top, use Hexagen Wrench [8] secure the screw:


1. at the location "A".
2. Electrical cord Outlet Wall Mounting Bracket [2] in the nut post at the electrical cord position. (location "B")

Then use Phillips Head Screw [7] to fix Wall Mounting Bracket [1] on the nut post on the back of the product. (location "C")

02

A: 22.36" [568 mm]

B: 34.92" [887 mm]

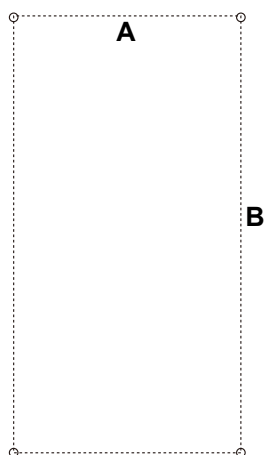


STEP 2:

Mark the mounting brackets location on the wall according to the data as shown.

Make sure the bottom of the product at least 23.62" [600mm] off the ground and the product is horizontal.


03

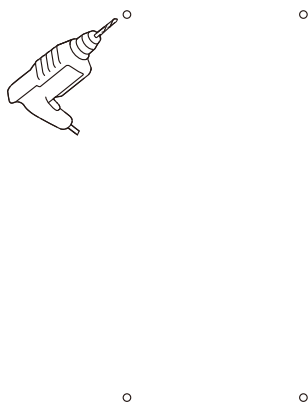

STEP 3:

Use an 8MM drill bit to drill holes at the marked locations.

1. Plug-in Installation (2 / 2)

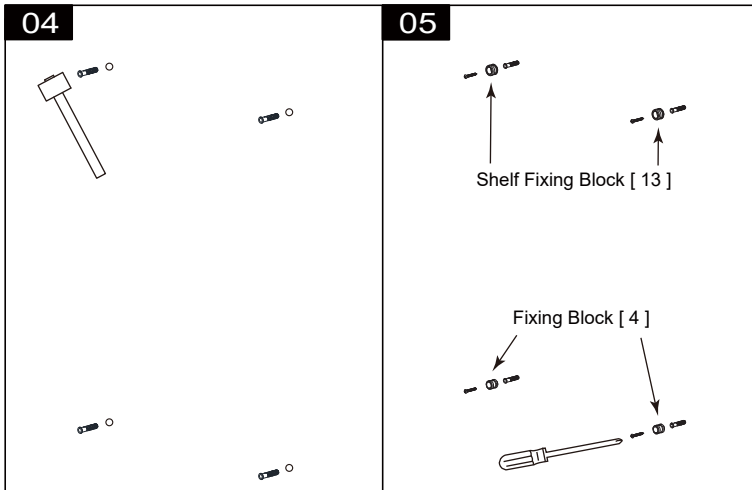


STEP 4:

Knock Screw Expansion Tube [6] into the drilled hole.

STEP 5:

Fix the Fixing Block [4] and Shelf Fixing Block [13] to the wall with Self-tapping Screw [5] slightly as shown.

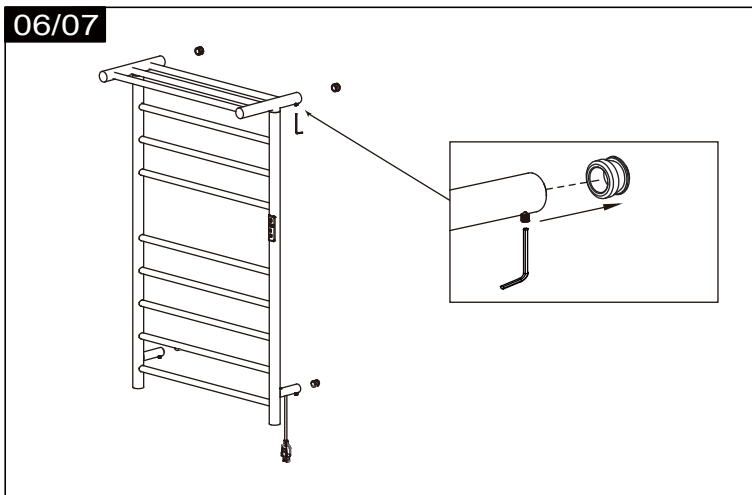

STEP 6:

Put the product to the Fixing Block, make sure it is horizontal. Then take away the product, fix the Fixing Blocks to the wall with Self-tapping Screw [5] fully.

STEP 7:

Assemble the product to the wall mounting base, screw the tapered end set screw into the screw hole of the round tube support tube with Hexagen Wrench [8] and tighten it.




STEP 8:

Plug the electrical cord into a GFCI protected outlet.

2. Hardwire Installation (1 / 3)

01

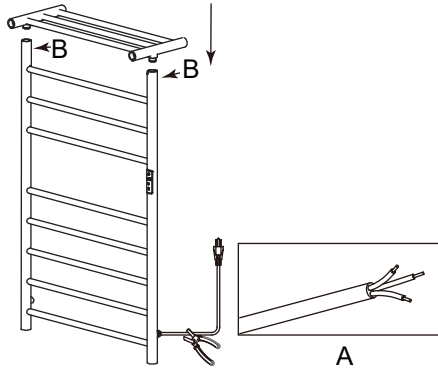


STEP 1:

Use scissors to cut off the electrical cord about 4.7" [120mm] from the back of the towel rack, and use a wire stripper to strip it. (location "A")

Install the Shelf [14] at the top, then Use Hexagen Wrench [8] secure the screw at location "B".


02

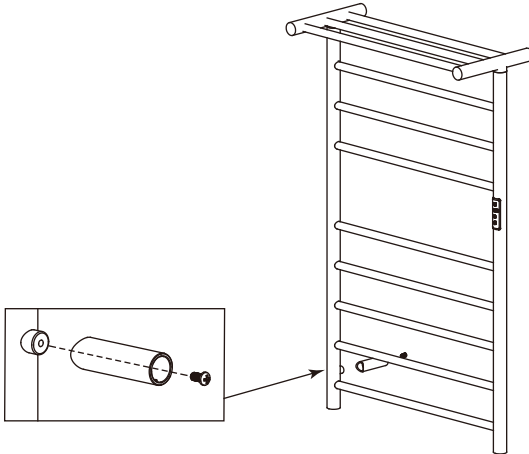

STEP 2:

Use Phillips Head Screw [7] to fix the Wall Mounting Bracket [1] on the nut post on the back of the product.

03

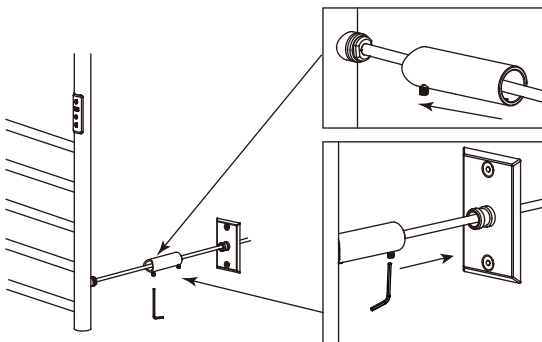


STEP 3:

Insert Hardwired Wall [9] Mounting Bracket onto the nut post of the electrical cord position, and tighten the two tapered end set screws with Hexagen Wrench [8] fixed with nut column and Hardwired Wall Mounting Plate [10] respectively.

2. Hardwire Installation (2 / 3)


04

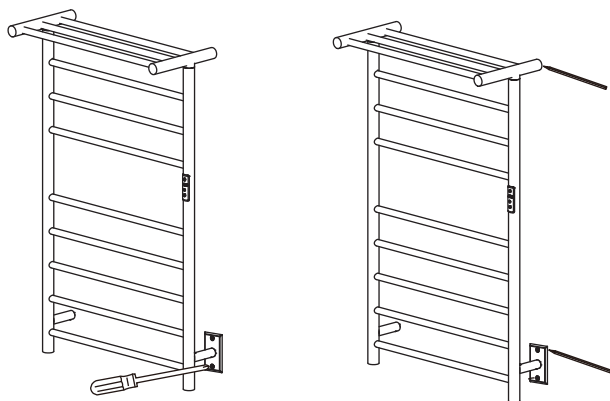

STEP 4:

Place the product on the wall, cover the installation cover on the wire box, use Cap Screw [12] to fix Hardwired Wall Mounting Plate [10] to the wire box, use a level to adjust the angle of the product, and use a pencil to mark the hanging wall. The position of bracket screws and decorative cover concealed installation.

05

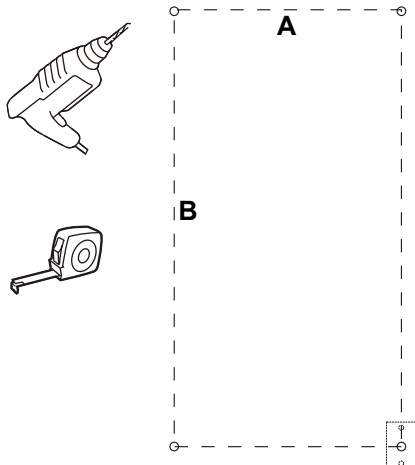


A: 22.36" [568 mm]

B: 34.92" [887 mm]


STEP 5:

Use a screwdriver to remove Hardwired Wall Mounting Bracket [9] from the wall. Check the distance of locations as shown. Then use an 8MM drill bit to drill holes at the marked locations.

06

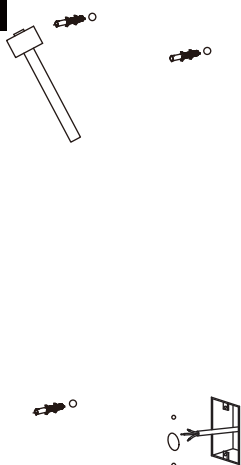

07

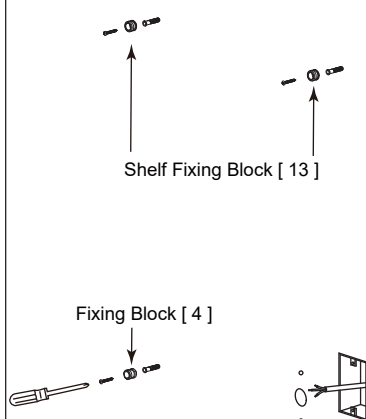

STEP 6:

Knock Screw Expansion Tube [6] into the drilled hole.


STEP 7:

Fix the Fixing Block [4] and Shelf Fixing Block [13] to the wall with Self-tapping Screw [5] slightly as shown.

Put the product to the Fixing Block, make sure it is horizontal, then take away the product, fix the Fixing Block [4] to the wall with Self-tapping Screw [5] fully.

2. Hardwire Installation (3 / 3)


08

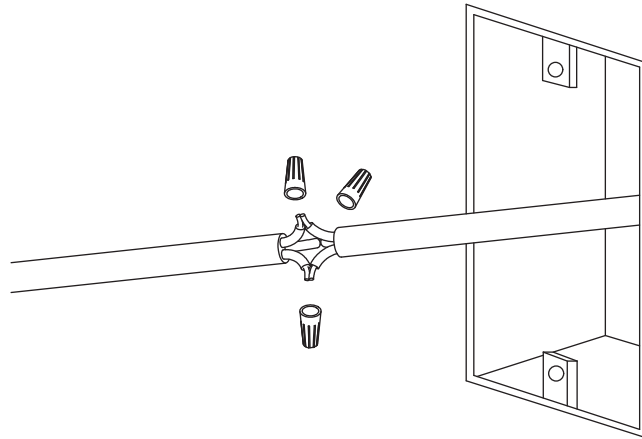

STEP 8:

Strip the insulation from the electrical cord and connect both electrical cord to tighten the copper wire ends of the electrical cord in the junction box respectively. Then use the Wire Nut [11] to fix the copper.

09

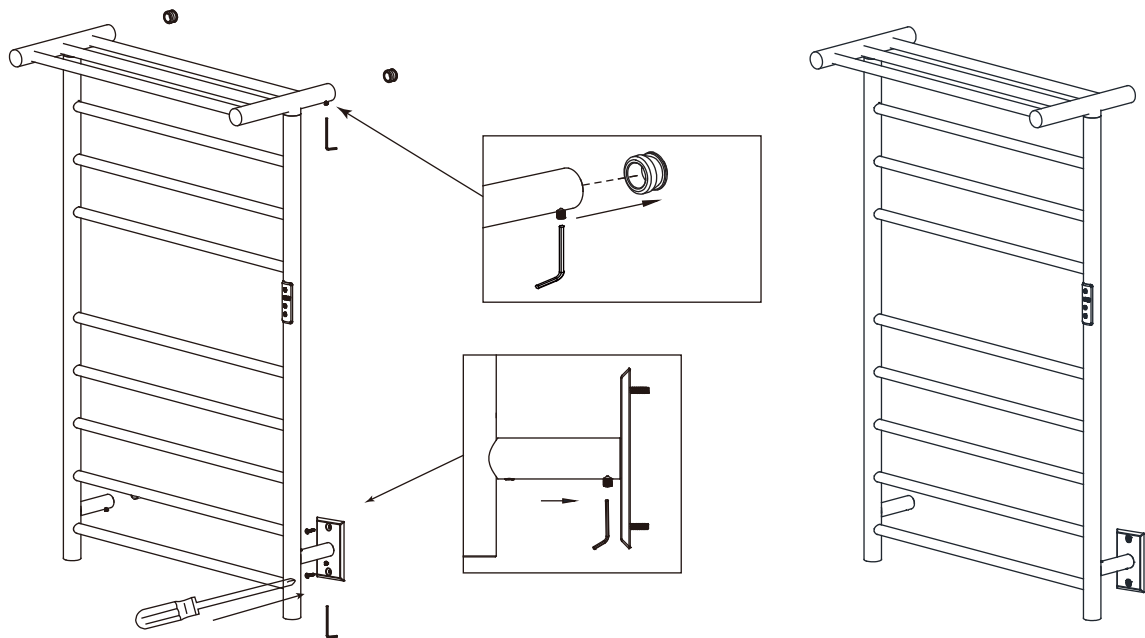

STEP 11:

Assemble the product to the wall mounting base, use Hexagen Wrench [8] to screw the tapered set screw into the screw hole of Wall Mounting Bracket [1] and tighten. Use Cap Screw [12] to fix Hardwired Wall Mounting Plate [10] on the wall.

Towel Warmer Operating Instructions

1 Basic instructions:

1.1 Power supply specification: AC120V/60HZ

1.2 Setting temperature range: 100~140°F

1.3 Timing time: 1-8 hours


2 Digital tube display description:

2.1 Shutdown state: the digital tube does not display, as shown in the following figure:



2.2 Power on: Adjustable temperature range 100~140°F , adjustable timing time 1-8 hours and normally open (ON)

As shown in the following figures:

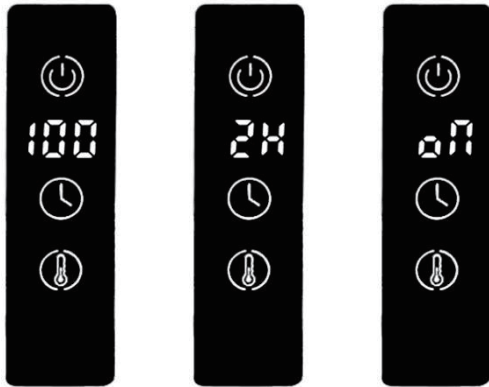

3 Operating instructions:

3.1 Power on/off: Short press  to turn on the device to enter the startup state, short press again to enter the shutdown state.

3.2 Timing setting: Short press  to flash, step by 1 hour, set the time until 8 hours, short press  again to display the word ON (ON means open normally open state, heating has no time limit and is only affected by the set temperature). Press again  for a short time to return to 1 hour. After setting it for 3 seconds, it will enter the working state without operation, and the digital tube will stop flashing; when the heating time is over, the device will automatically shut down

3.3 Temperature setting: Short press the  button to flash, step by 10°F, set the temperature until it reaches 140°F,

short press  again to set the temperature back to 100°F. After setting, the digital tube stops flashing if it is not operated for 3 seconds and enters the working state.

4. Error display

4.1 When the temperature probe is abnormal, the digital tube displays the following figure:

