



## 30" LED Mirror

Model: M-971-30

Size: 900\*750\*35MM



Touch Screen Mirror with Integrated Bluetooth  
**Installation • Operation • Safety • Warranty**

### Support:



[support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)



1-833-411-7372



[www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)



Energy-Saving  
LED Lighting



Integrated Touch  
Screen Interface



Bluetooth Audio  
Connectivity



Smart Defogger  
Function



Modern Frameless  
Design




Digital Clock &  
Temperature Display



Multi-function  
control screen

## PRODUCT FEATURES

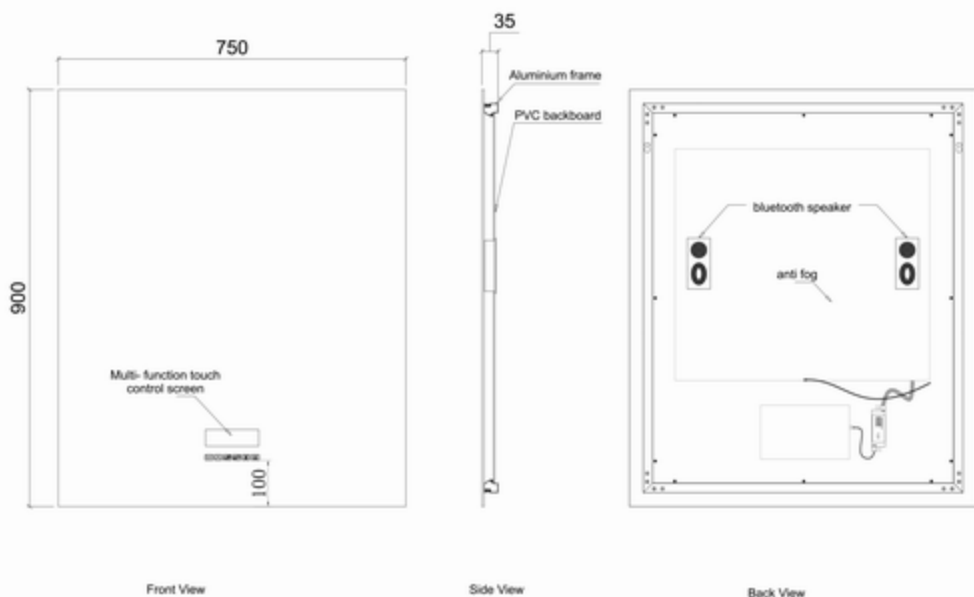

- 30" LED Mirror with built-in defogger
- Modern Frameless Design with dimming function
- Anti-Fog Function
- Energy-efficient 6000K LED Lighting (2371 lumens)
- Integrated Touch Screen Interface
- Bluetooth Audio Connectivity
- Digital clock and temperature

CONTACT US AT:

✉ [support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)

☎ 1-833-411-7372

🌐 [www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

## QUICK START

1. Turn OFF power at the breaker (verify with tester).
2. Locate studs and mark centerline; use included paper template.
3. Install hanging bar/brackets level.
4. Make hard-wired electrical connections.
5. Hang mirror; lock-catch for horizontal mount.
6. Restore power; test touch sensors (light, anti-fog, bluetooth, etc.).

## SAFETY & COMPLIANCE

- Installation by a licensed electrician only.
- Connect to a GFCI-protected, properly grounded circuit (120 V~ 60 Hz).
- Do not connect to any wall dimmer (ELV/triac). Use a standard ON/OFF switch if desired; dimming happens on the mirror.
- Two-person lift required; use PPE.
- Mount into wall studs whenever possible; use proper anchors for wall type.



DANGER



GFCI Protected



No wall dimmer



Ground properly



Two-person lift



PPE

### CONTACT US AT:



support@serabathroomdesigns.com



1-833-411-7372



www.serabathroomdesigns.com

## WHAT'S IN THE BOX & TOOLS

### INCLUDED



Mirror  
assembly



Hanging bar



Wall  
screws  
(x2)



Anchors (x2)

### TOOLS NEEDED



Band tap



Level



Pencil



PPE



Drill bits



Electronic drill



Cross screwdriver



Stud finder

### CONTACT US AT:



[support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)



1-833-411-7372





[www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

## HARDWIRE INSTRUCTIONS

**Warning: Manufacturer's warranty shall be void if product is not installed by a licensed professional**

Prior to commencing installation, please ensure the following:

- The wall where the product is being installed is able to support the weight of the product.
- The main electrical supply has been powered off to complete installation.

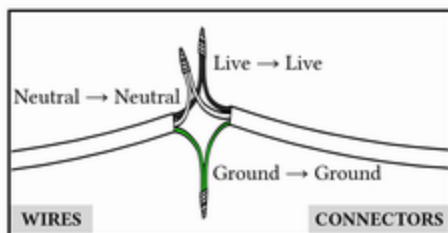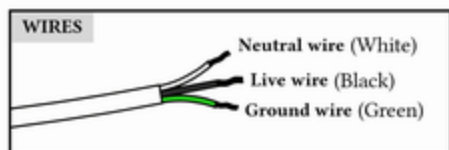

### Important

- Hard-wire only. Do not attach a cord-and-plug.
- Use listed wire connectors; make all splices inside approved boxes.
- Do not use a wall dimmer. Use a standard ON/OFF switch if wall control is required.


### CONTACT US AT:

✉ [support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)

☎ 1-833-411-7372

🌐 [www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

## WALL MOUNTING INSTRUCTIONS

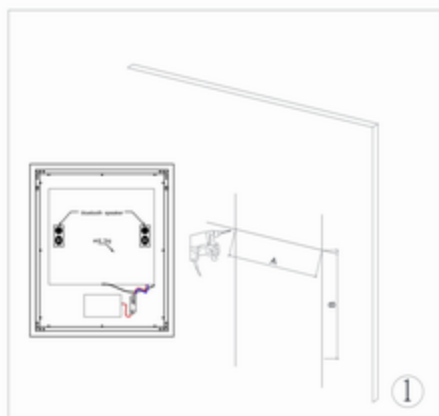


Measure the distance of the mounting hole.  
Drill holes with a suitable sized drill.



Insert the anchor and mounting screw into the wall.



Connect the mirror wires with your main wires and hang the mounting hole to the screw on the wall.

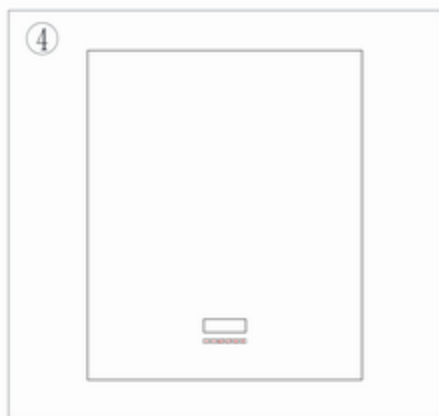

Peel off protective film and clean the mirror with damp cloth.

### CONTACT US AT:



[support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)




1-833-411-7372



[www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

## OPERATION & FEATURES

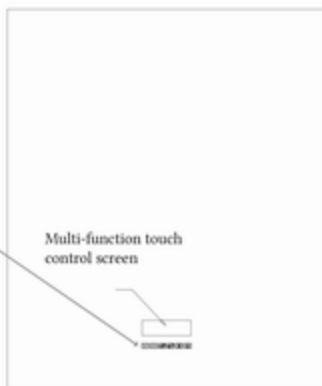

-  Touch this button in order to turn the lighting ON/OFF.  
Touch and hold this button in order to dim the light intensity.
-  Touch this button in order to turn the defogger ON/OFF.
-  Touch this button in order to turn the Bluetooth speaker ON/OFF.
-  Using a short touch this button controls Play and Pause functionalities.  
Press and hold this button to engage the clock's program mode.  
In program mode, the clock will go through all 4 number fields with a 3 second break in between. To set the time, press the button again while the number field is flashing.
-  Touch this button to play next song.  
Touch this button and hold for 3 second to make the volume higher.
-  Touch this button to play next song.  
Touch this button and hold for 3 second to lower the volume.

### CONTACT US AT:

 [support@serabathroomdesigns.com](mailto:support@serabathroomdesigns.com)

 1-833-411-7372

 [www.serabathroomdesigns.com](http://www.serabathroomdesigns.com)

## CARE & CLEANING AND TROUBLESHOOTING

### CARE & CLEANING



Wipe with a soft, lint-free cloth; mild non-ammonia cleaner.



Do not use abrasives, pads, acids, or solvents.



Apply cleaner to cloth, not directly on sensor areas.

### TROUBLESHOOTING (QUICK FIXES)



No light at install: Confirm breaker ON, correct wiring, internal quick-connects fully seated.



Touch unresponsive: Power cycle at breaker for 60 seconds; clean/dry glass over sensors.



Buzz/Hum: Ensure unit is not on a wall dimmer; verify solid ground.



Anti-fog not warming: Ensure left sensor is ON; feature auto-turns-off after 1 hour.

#### CONTACT US AT:



support@serabathroomdesigns.com



1-833-411-7372



www.serabathroomdesigns.com